

Dominion Exploration & Production, Inc.
P.O. 1360
Roosevelt, UT 84066

August 7, 2003

Utah Division of Oil, Gas, & Mining
1594 West North Temple, Suite 1210
P.O. Box 145801
Salt Lake City, UT 84114-5801


RE: APPLICATION FOR PERMIT TO DRILL
RIVERBEND UNIT 6-10F
SE/NW, SEC. 10, T10S, R20E
UINTAH COUNTY, UTAH
LEASE NO.: U-7206
UTE INDIAN TRIBAL LANDS

Enclosed please find a copy of the Application for Permit to Drill and associated attachments for the above-referenced well.

All further communication regarding the permit for this well, including the 7-day letter, communication regarding approval, and the approved APD should be directed to:

Ed Trotter, Agent
P.O. Box 1910
Vernal, UT 84078
Phone: (435)789-4120
Fax: (435)789-1420

Sincerely,



Ed Trotter
Agent

Dominion Exploration & Production, Inc.

Attachments

RECEIVED

AUG 11 2003

DIV. OF OIL, GAS & MINING

001

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. U-7206	
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE		6. If Indian, Allottee or Tribe Name Ute Indian Tribe	
2. Name of Operator Dominion Exploration & Production, Inc.		7. If Unit or CA Agreement, Name and No. River Bend Unit	
3a. Address 14000 Quail Spgs Parkway, Okla. City, OK 73134		8. Lease Name and Well No. RBU 6-10F	
3b. Phone No. (include area code) 405-749-1300		9. API Number 43-047-35128	
4. Location of Well (Report location clearly and in accordance with any state requirements.)* At surface 4424466 Y 1733' FNL & 2490' FWL, SE/NW At proposed prod. zone 615144 X 39.96440 -109.65183		10. Field and Pool, or Exploratory Natural Buttes	
14. Distance in miles and direction from nearest town or post office* 9.75 miles South of Ouray		11. Sec., T., R., M., or Blk and Survey or Area 10-10S-20E	
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drlg. unit line, if any) 1733'		12. County of Parish Uintah	
16. No. of Acres in lease 1800		13 State UT	
17. Spacing Unit dedicated to this well 40		18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 1026'	
19. Proposed Depth 7100'		20. BLM/BIA Bond No. on file 76S 63050 0330	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5026'		22. Approximate date work will start* 01-Jul-04	
		23. Estimated duration 45 days	

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification.
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature <i>Carla Christian</i>	Name (Printed/Typed) Carla Christian	Date August 7, 2003
Title Regulatory Specialist		
Approved by (Signature) <i>Bradley G Hill</i>	Name (Printed/Typed) BRADLEY G HILL	Date 08-18-03
Title Environmental Scientist III		


Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

RECEIVED
AUG 11 2003
DIV. OF OIL, GAS & MINING

T10S, R20E, S.L.B.&M.

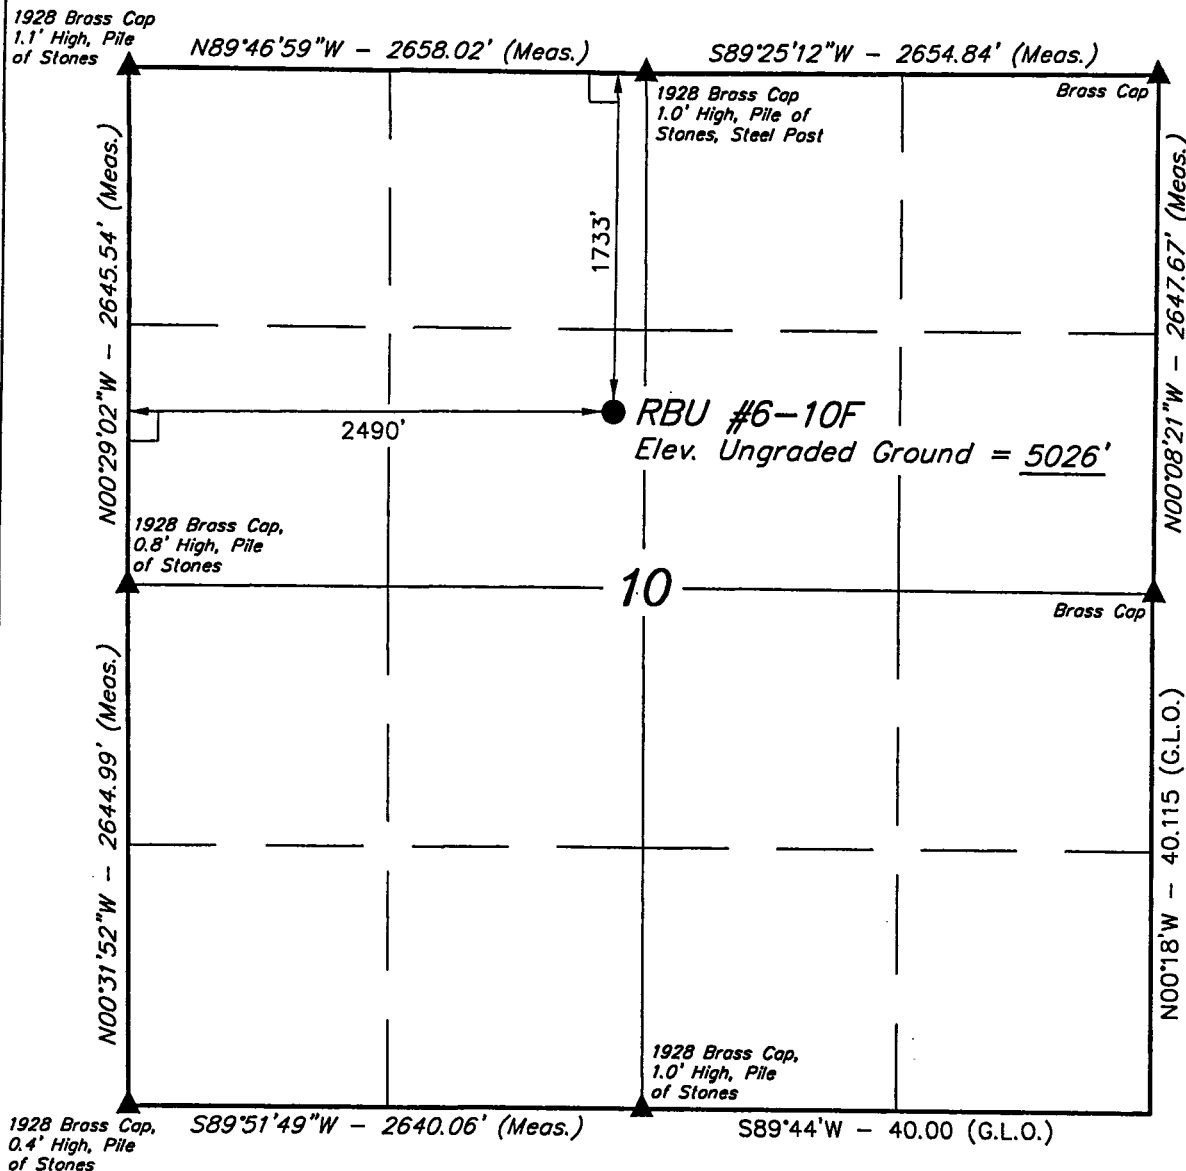

LEGEND:

└─┘ = 90° SYMBOL

● = PROPOSED WELL HEAD.

▲ = SECTION CORNERS LOCATED.

(NAD 83)
 LATITUDE = 39°57'51.96" (39.964433)
 LONGITUDE = 109°39'08.23" (109.652286)

DOMINION EXPLR. & PROD., INC.


Well location, RBU #6-10F, located as shown in the SE 1/4 NW 1/4 of Section 10, T10S, R20E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE, QUADRANGLE, UTAH, UTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

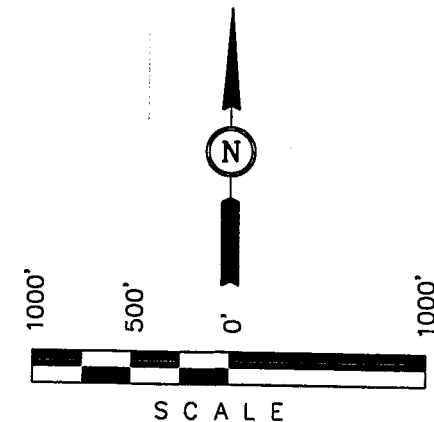

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



UINTAH ENGINEERING & LAND SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 05-04-03	DATE DRAWN: 05-08-03
PARTY D.A. J.O. D.COX	REFERENCES G.L.O. PLAT	
WEATHER COOL	FILE DOMINION EXPLR. & PROD., INC.	

DRILLING PLAN

APPROVAL OF OPERATIONS

Attachment for Permit to Drill

Name of Operator: Dominion Exploration & Production
Address: 14000 Quail Springs Parkway, Suite 600
Oklahoma City, OK 73134
Well Location: RBU 6-10F
1733' FNL & 2490' FWL
Section 10-10S-20E
Uintah County, UT

1. GEOLOGIC SURFACE FORMATION Uintah

2. ESTIMATED DEPTHS OF IMPORTANT GEOLOGIC MARKERS

<u>Formation</u>	<u>Depth</u>
Green River	1,367'
Wasatch Tongue	4,277'
Green River Tongue	4,607'
Wasatch	4,767'
Chapita Wells	5,667'
Uteland Buttes	6,867'

3. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS

<u>Formation</u>	<u>Depth</u>	<u>Type</u>
Green River	1,367'	Oil
Wasatch Tongue	4,277'	Oil
Green River Tongue	4,607'	Oil
Wasatch	4,767'	Gas
Chapita Wells	5,667'	Gas
Uteland Buttes	6,867'	Gas

4. PROPOSED CASING PROGRAM

All casing used to drill this well will be new casing.

<u>Type</u>	<u>Size</u>	<u>Weight</u>	<u>Grade</u>	<u>Conn.</u>	<u>Top</u>	<u>Bottom</u>	<u>Hole</u>
Surface	13-3/8"	48.0 ppf	H-40	STC	0'	500'	17-1/2"
Intermediate	8-5/8"	32.0 ppf	J-55	LTC	0'	2,200'	12-1/4"
Production	5-1/2"	17.0 ppf	MAV-80	LTC	0'	7,100'	7-7/8"

5. OPERATOR'S MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL

Surface hole: No BOPE will be utilized.

Intermediate hole: To be drilled using a diverter stack with rotating head to divert flow from rig floor.

Production hole: Prior to drilling out the intermediate casing shoe, 3,000 psi or greater BOP equipment will be installed. The pipe rams will be operated at least once per day from intermediate casing to total depth. The blind rams will be tested once per day from intermediate casing to total depth if operations permit.

DRILLING PLAN

APPROVAL OF OPERATIONS

A diagram of the planned BOP equipment for normal drilling operations in this area is attached. As denoted there will be two valves and one check valve on the kill line, two valves on the choke line, and two adjustable chokes on the manifold system. The BOP "stack" will consist of two BOP rams (1 pipe, 1 blind) and one annular type preventer, all rated to a minimum of 3,000 psi working pressure.

The BOP equipment will be pressure tested prior to drilling below the intermediate casing shoe. All test pressures will be maintained for fifteen (15) minutes without any significant pressure decrease. Clear water will be circulated into the BOP stack and lines prior to pressure testing. The following test pressures will be used as a minimum for various equipment items.

1.	Annular BOP	1,500 psi
2.	Ram type BOP	3,000 psi
3.	Kill line valves	3,000 psi
4.	Choke line valves and choke manifold valves	3,000 psi
5.	Chokes	3,000 psi
6.	Casing, casinghead & weld	1,500 psi
7.	Upper kelly cock and safety valve	3,000 psi
8.	Dart valve	3,000 psi

6. MUD SYSTEMS

- An air or an air/mist system may be used to drill the surface hole until water influx becomes too great.
- KCL mud system will be used to drill well.

<u>Depths</u>	<u>Mud Weight (ppg)</u>	<u>Mud System</u>
0' – 500'	8.4	Air foam mist, no pressure control
500' – 2,200'	8.6	Fresh water, rotating head and diverter
2,200' – 7,100'	8.6	Fresh water/2% KCL/KCL mud system

7. BLOOIE LINE

- An automatic igniter will not be installed on blooie line. The blooie will have a constant ignition source.
- A "target tee" connection will be installed on blooie line for 90° change of directions for abrasion resistance.
- "Target tee" connections will be a minimum of 50' from wellhead.
- The blooie line discharge will be a minimum of 100' from the wellhead.

8. AUXILIARY EQUIPMENT TO BE USED

- a. Kelly cock.
- b. Full opening valve with drill pipe connection will be kept on floor. Valve will be used when the kelly is not in string.

9. TESTING, LOGGING, AND CORING PROGRAMS TO BE FOLLOWED

- A drillstem test in the Wasatch Tongue is possible.
- One electric line wire-log will be run from total depth to intermediate casing.
- The gamma ray will be left on to record from total depth to intermediate casing.
- Other log curves (resistivities, porosity, and caliper) will record from total depth to intermediate casing.
- A dipmeter, percussion cores, or rotary cores may be run over selected intervals.

10. ANTICIPATED ABNORMAL PRESSURES OR TEMPERATURES EXPECTED

- Expected BHP 1,500–2,000 psi (lower than normal pressure gradient).
- No abnormal temperature or pressures are anticipated.
- The formations to be penetrated do not contain known H₂S gas.

11. WATER SUPPLY

- No water pipelines will be laid for this well.
- No water well will be drilled for this well.
- Drilling water for this will be hauled on the road(s) shown in Attachment No. 3.
- Water will be hauled from: Water Permit # 43-10447 Section 9, Township 8 South, Range 20 East

DRILLING PLAN

APPROVAL OF OPERATIONS

12. CEMENT SYSTEMS

a. Surface Cement:

Drill 17-1/2" hole to 500' and cement 13-3/8" to surface with 450 sks class "C" cement with 2% CaCl₂ and 1/4 #/sk. Poly-E-Flakes (volume includes 40% excess). Top out if necessary with Top Out cement listed below.

b. Intermediate Casing Cement:

- Drill 12-1/4" hole to 2,200'±, run and cement 8-5/8" to surface.
- Pump 20 bbls lightly weighted water spacer followed by 5 bbls fresh water. Displace with any available water.
- Casing to be run with: a) guide shoe b) insert float c) three (3) centralizers, one on each of first 3 joints d) stop ring for plug two joints off bottom e) bottom three joints thread locked f) pump job with bottom plug only.
- Cement to surface not required due to surface casing set deeper than normal.

Type	Sacks	Interval	Density	Yield	Hole Volume	Cement Volume	Excess
Lead	385	0'-1,700'	11.0 ppg	3.82 CFS	733 CF	1,466 CF	100%
Tail	370	1,700'-2,200'	15.6 ppg	1.20 CFS	220 CF	440 CF	100%

Lead Mix: Halliburton Prem Plus V blend. Blend includes Class "C" cement, gel, salt, gilsonite, EX-1 and HR-7.
Slurry yield: 3.82 cf/sack Slurry weight: 11.00 #/gal.
Water requirement: 22.95 gal/sack
Compressives @ 130°F: 157 psi after 24 hours

Tail Mix: Class "G" Cement, 1/4 lb/sk Cellophane Flakes + 2% bwoc Calcium Chloride + 44.3% fresh water.
Pump Time: 1 hr. 5 min. @ 90 °F.
Compressives @ 95 °F: 24 Hour is 4,700 psi

c. Production Casing Cement:

- Drill 7-7/8" hole to 7,100'±, run and cement 5 1/2".
- Cement interface is at 4,000', which is typically 500'-1,000' above shallowest pay.
- Pump 20 bbl Mud Clean II unweighted spacer, followed by 20 Bbls fresh H2O spacer.
- Displace with 3% KCL.

Type	Sacks	Interval	Density	Yield	Hole Volume	Cement Volume	Excess
Lead	160	3,700'-4,700'	11.5 ppg	3.12 CFS	175 CF	350 CF	100%
Tail	435	4,700'-7,100'	13.0 ppg	1.75 CFS	473 CF	946 CF	100%

Note: Caliper will be run to determine exact cement volume.


Lead Mix: Halliburton Prem Plus V blend. Blend includes Class "C" cement, gel, salt, gilsonite, EX-1 and HR-7.
Slurry yield: 3.12 cf/sack Slurry weight: 11.60 #/gal.
Water requirement: 17.71 gal/sack
Compressives @ 130°F: 157 psi after 24 hours

Tail Mix: Halliburton HLC blend (Prem Plus V/JB flyash). Blend includes Class "G" cement, KCl, EX-1, Halad 322, & HR-5.
Slurry yield: 1.75 cf/sack Slurry weight: 13.00 #/gal.
Water requirement: 9.09 gal/sack
Compressives @ 165°F: 905 psi after 24 hours


13. ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS

Starting Date: July 1, 2004
Duration: 14 Days


BOP STACK

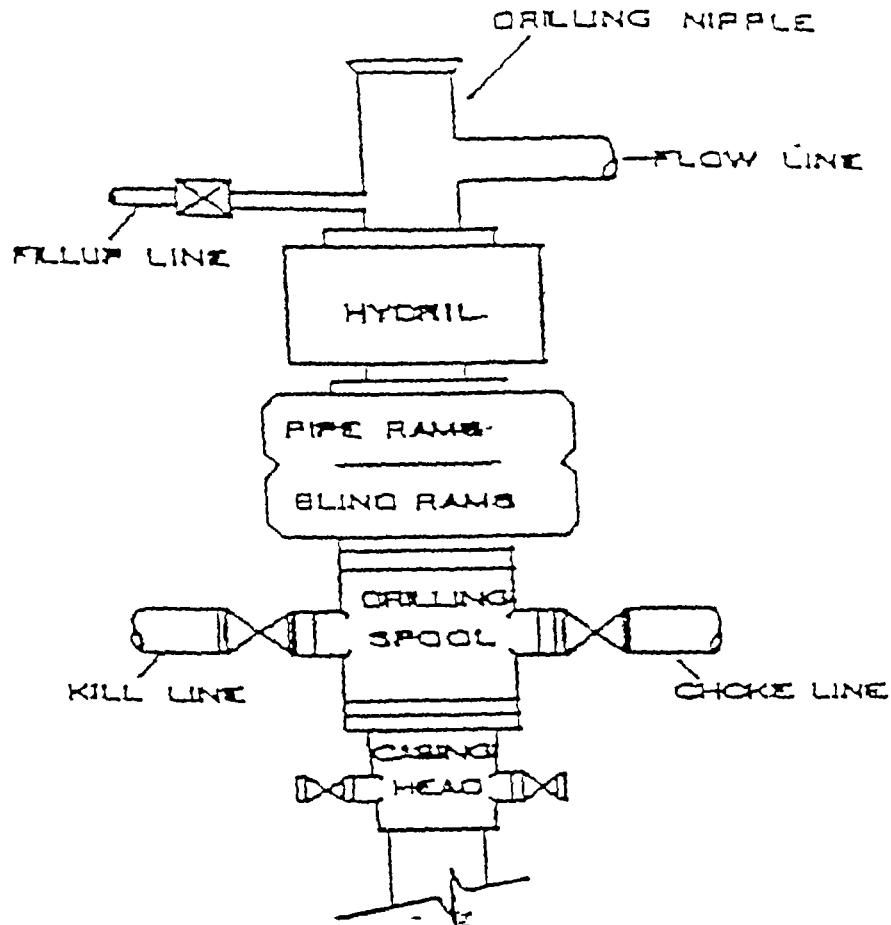

CHOKE MANIFOLD

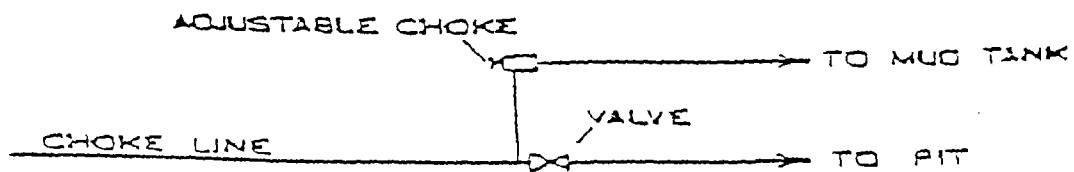

CONFIDENTIAL

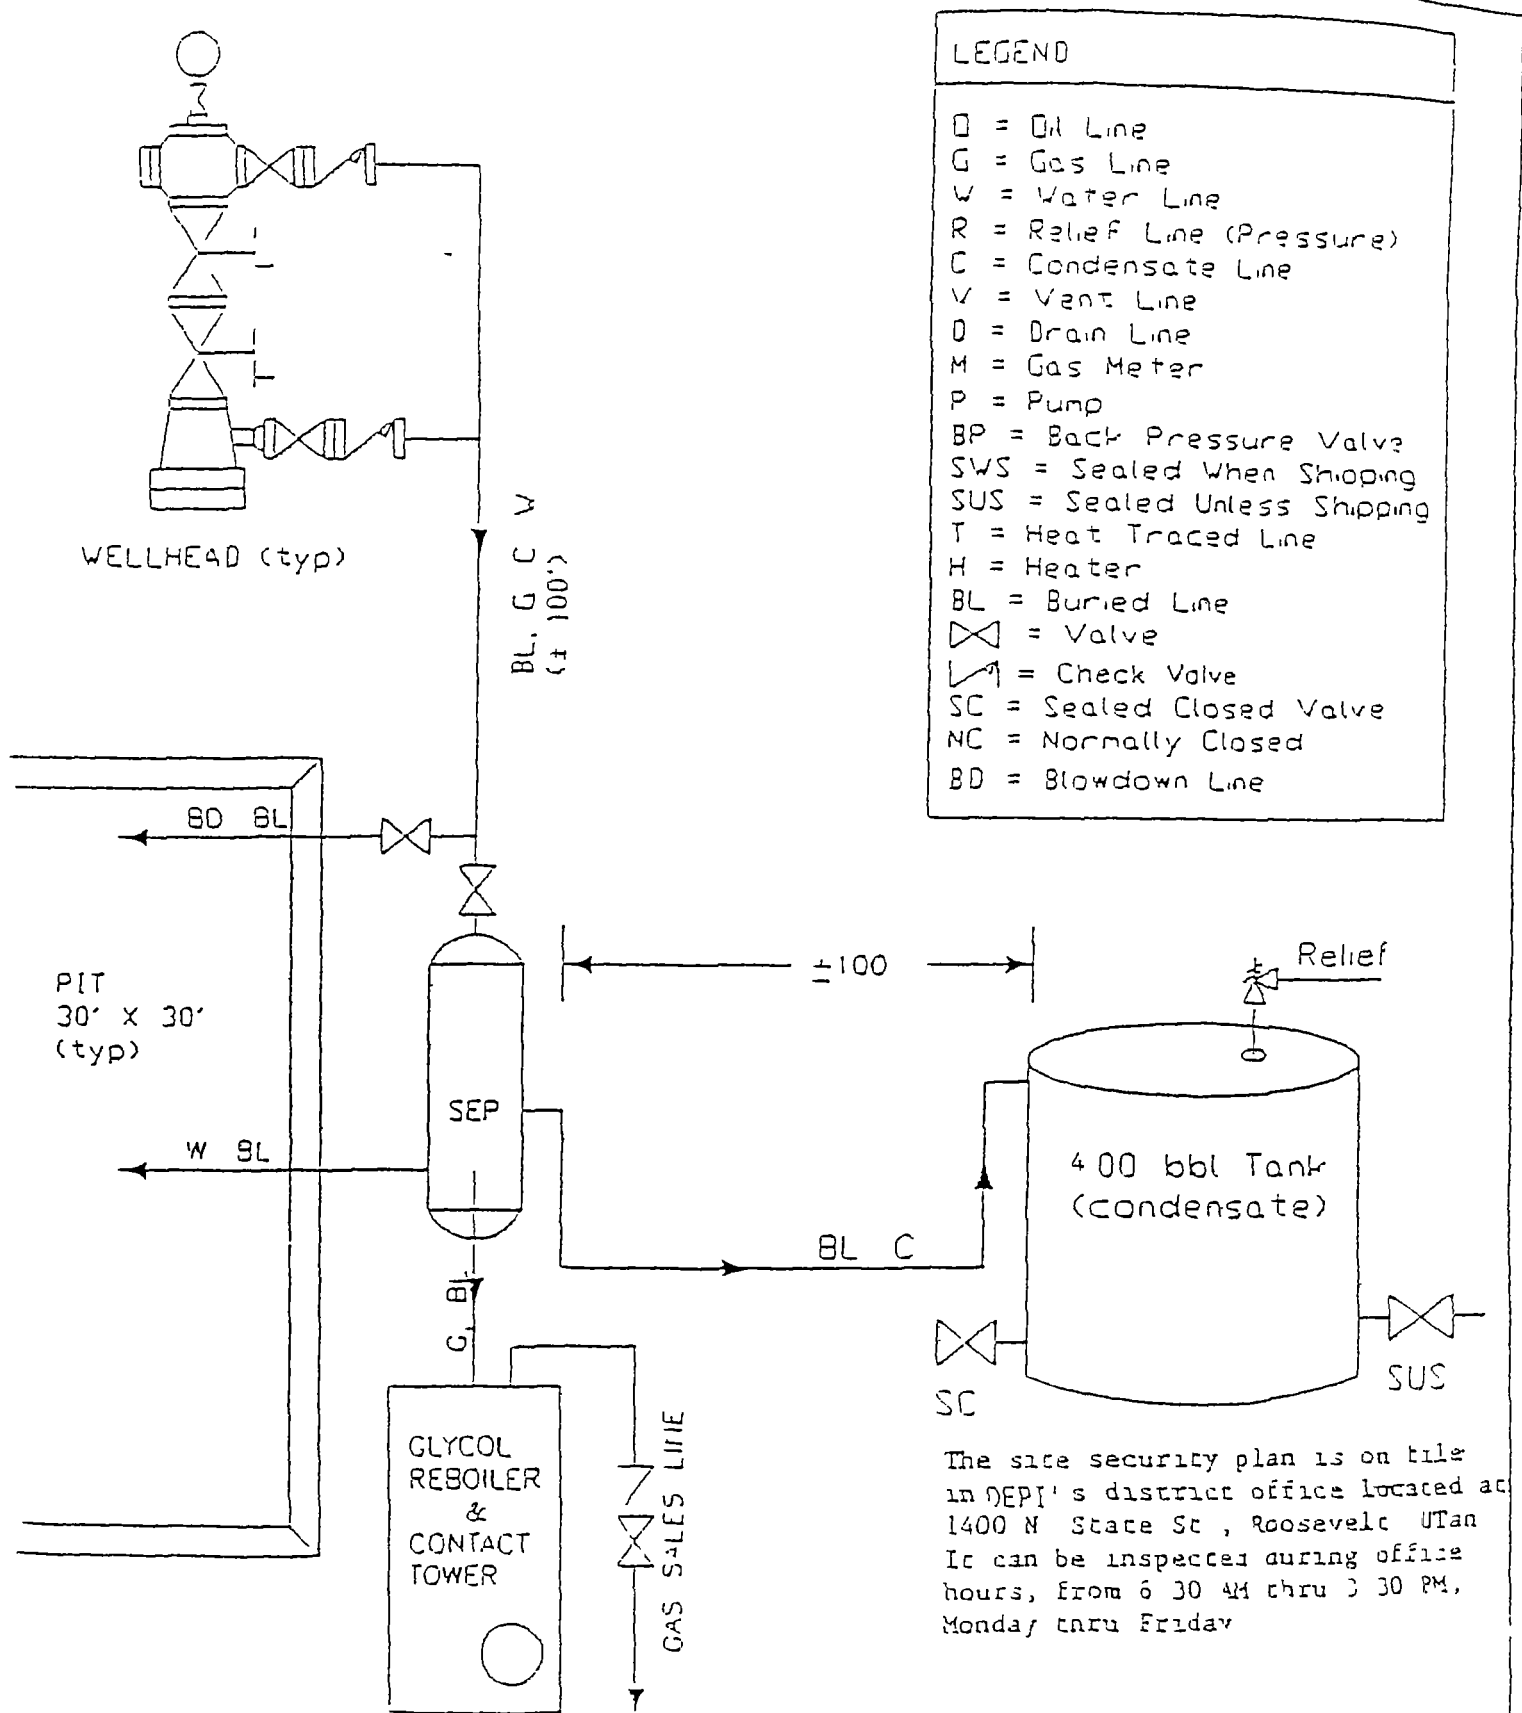

DOMINION EXPLORATION & PRODUCTION, INC

RIVER BEND FIELD, Uinta County

no - to scale

DOMINION EXPLR. & PROD., INC.

RBU #6-10F

SECTION 10, T10S, R20E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 9.1 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 0.65 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE SOUTHWEST; FOLLOW ROAD FLAGS IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 100' TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 40.75 MILES.

**CONDITIONS OF APPROVAL
FOR THE SURFACE USE PROGRAM OF THE
APPLICATION FOR PERMIT TO DRILL**

Company/Operator: Dominion Exploration & Production, Inc.
Well Name & Number: Riverbend Unit 6-10F
Lease Number: U-7206
Location: 1733' FNL & 2490' FWL, SE/NW, Sec.10,
T10S, R20E, S.L.B.&M., Uintah County
Surface Ownership: Ute Indian Tribe

NOTIFICATION REQUIREMENTS

Location Construction - forty-eight (48) hours prior to construction
of location and access roads.

Location Completion - prior to moving on the drilling rig.

Spud Notice: - at least twenty-four (24) hours prior to
spudding the well.

Casing String and
Cementing - twenty-four (24) hours prior to running
casing and cementing all casing strings.

BOP and related
Equipment Tests - twenty-four (24) hours prior to running
casing and tests.

First Production
Notice - within five (5) business days after new
Well begins or production resumes after
Well has been off production for more
than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of
Approval for Notice to Drill and Surface Use Program.

SURFACE USE PROGRAM

1. EXISTING ROADS

- A. See attached Wellsite Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 9.75 miles south of Ouray, Utah - See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary. No off lease Right-of-Way will be required.

2. PLANNED ACCESS ROAD

- A. The access road will be approximately 100 feet in length. See attached TOPO Map "B".
- B. The access road has a 30 foot ROW w/ 18 foot running surface.
- C. Maximum grade on access road will be 8%.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. One 18" CMP will be installed in the access road.
- G. The access road will be dirt surface.
- H. No gates, cattleguards, or fences will be required or encountered.

New or reconstructed roads will be centerlined - flagged at time of location staking.

All travel will be confined to existing access road Right-of-Way.

Access roads and surface disturbing activities will conform to standards outlined in the Bureau of Land Management and Forest Service Publication: Surface Operating Standards For Oil & Gas Exploration and Development, (1989).

The road shall be upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Upgrading shall include ditching, drainage, graveling, crowning, and capping the roadbed as necessary to provide a well-constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot Right-of-Way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by run off water shall be prevented by diverting water off at frequent

intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, Dominion Exploration & Production, Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

3. **LOCATION OF EXISTING WELLS WITHIN A ONE MILE RADIUS OF PROPOSED WELL LOCATION**

- A. Abandoned wells – 2*
- B. Producing wells - 21*
- C. Shut in wells – 1*

(*See attached TOPO map “C” for location)

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

A. **ON WELL PAD**

- 1. Production facilities will be set on location if the well is successfully completed for production. Facilities will consist of wellhead valves, separator and dehy units with meter, 400 barrel vertical condensate tank, and attaching piping.
- 2. Gas gathering lines - A 4” gathering line will be buried from dehy to the edge of the location.
- 3. Surface pits – After the well is hydraulically fraced, it will be flowed back into the surface pits. After first production, a 400 barrel tank will be installed to contain produced waste water.

B. **OFF WELL PAD**

- 1. Proposed location of attendant off pad flowlines shall be flagged prior to archaeological clearance.
- 2. A 4” OD steel above ground natural gas pipeline will be laid approximately 40’ from proposed location to a point in the SE/NW of Section 10, T10S, R20E, where it will tie into Questar Pipeline Co.’s existing line. Proposed pipeline crosses Ute Indian Tribe lands within the River Bend Unit, thus a Right-of -Way grant will be required.
- 3. Proposed pipeline will be a 4” OD steel, welded line laid on the surface.
- 4. Protective measures and devices for livestock and wildlife will be taken and/or installed where required.

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike

of sufficient capacity to contain, at a minimum, the entire contents of the largest tank within the facility/battery.

The production facilities will be placed on the Southwest end of the location.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within 6 months of installation. Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

The required paint color is Desert Brown.

5. **LOCATION & TYPE OF WATER SUPPLY**

- A. Water source will be from Water Permit No. 43-10447 located in Sec. 9, T8S, R20E, Uintah County, Utah.
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

6. **SOURCE OF CONSTRUCTION MATERIAL**

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of the location.
- B. All construction material will come from Tribal Land.
- C. No mineral materials will be required.

7. **METHODS OF HANDLING WASTE DISPOSAL**

A. METHODS AND LOCATION

- 1. Cuttings will be confined in the reserve pit.
- 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
- 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at the Uintah County Landfill.
- 4. Produced wastewater will be confined to a lined or unlined pit or storage tank for a period not to exceed 90 days after initial production. After the 90-day period, the produced water will be contained in a tank on location and then disposed of at Ace Disposal, MCMC Disposal or Dominion's RBU 16-19F Disposal Well.

5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.
- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in the reserve pit or be removed and disposed of at an authorized disposal site. Introduction of well bore hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

On Ute Indian Tribe administered land:

The reserve pit will be constructed so as not to leak, break, or allow discharge. If the reserve pit requires padding prior to lining (due to rocky conditions) felt padding will be used.

8. HAZARDOUS CHEMICALS:

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

9. ANCILLARY FACILITIES

- A. No airstrips or camps are planned for this well.

10. WELLSITE LAYOUT

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation, parking areas, and access road.

The reserve pit will be located on the Southwest corner of the location. The flare pit will be located downwind of the prevailing wind direction on the West side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled location topsoil will be stored West of Corner #2 and between Corners 5 and 6 of the location .

Access to the well pad will be from the Northeast.

Corners #2, #6, & #8 will be rounded off to minimize excavation.

11. FENCING REQUIREMENTS:

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 feet.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until clean-up.

12. PLANS FOR RESTORATION OF SURFACE

A. PRODUCING LOCATION

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours.

The reserve pit will be reclaimed within 12 months from the date of well completion. Before any dirt work takes place, the reserve pit will be completely dry and all cans, barrels, pipe, fluid, and hydrocarbons, will be removed.

Contact appropriate surface management agency for required seed mixture.

B. DRY HOLE/ABANDONED LOCATION

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BIA will attach the appropriate surface rehabilitation conditions of approval.

13. **SURFACE OWNERSHIP**

Access road: Tribal

Location: Tribal

14. **OTHER INFORMATION**

A. Dominion Exploration & Production, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the AO. Within five working days the AO will inform the operator as to:

-whether the materials appear eligible for the National Register of Historic Places;

-the mitigation measures the operator will likely have to undertake before the site can be used.

-a time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs.

The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

B. As operator, Dominion Exploration & Production, Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BIA, or the appropriate County Extension Office. On BIA administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.

C. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on Tribal Lands after the conclusion of drilling operations or at any other time without BIA authorization. However, if BIA authorization is obtained, it is only a temporary measure to allow time to make

arrangements for permanent storage on commercial facilities. (The BIA does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)

Additional Surface Stipulations

None

LESSEE'S OR OPERATOR'S REPRESENTATIVE

CONTACTS:

OPERATIONS

Mitchiel Hall
P.O. Box 1360
Roosevelt, UT 84066
Telephone: (435) 722-4521
Fax : (435) 722-5004

PERMITTING

Ed Trotter
P.O. Box 1910
Vernal, UT 84078
Telephone: (435) 789-4120
Fax: (435) 789-1420

All lease or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approval plan of operations, and any applicable Notice to Lessees. Dominion Exploration & Production, Inc. is fully responsible for the actions of their subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

A copy of the approved APD and ROW grant, if applicable, shall be on location during construction of the location and drilling activities.

CERTIFICATION:

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with operations proposed herein will be performed by Dominion Exploration & Production, Inc. and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

Date 8-7-2003




Ed Trotter, Agent

Dominion Exploration & Production, Inc.

SELF-CERTIFICATION STATEMENT

Under Federal regulation, effective June 15, 1988, designation of operator forms are no longer required when the operator is not the 100% record title holder. An operator is now required to submit a self-certification statement to the appropriate office stating that said operator has the right to operate upon the leasehold premises. Said notification may be in the following format:

Please be advised that **Dominion Exploration & Production, Inc.** is considered to be the operator of **Well No. 6-10F**, located in the **SE ¼ NW ¼ of Section 10, T10S, R20E in Uintah County; Lease No. U-7206**; and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by Travelers Casualty and Surety Company of America, Bond #76S 63050 0330.

A handwritten signature in cursive script, reading "Carla Christian".

Carla Christian

Regulatory Specialist

DOMINION EXPLR. & PROD., INC.

RBU #6-10F

LOCATED IN UINTAH COUNTY, UTAH
SECTION 10, T10S, R20E, S.L.B.&M.

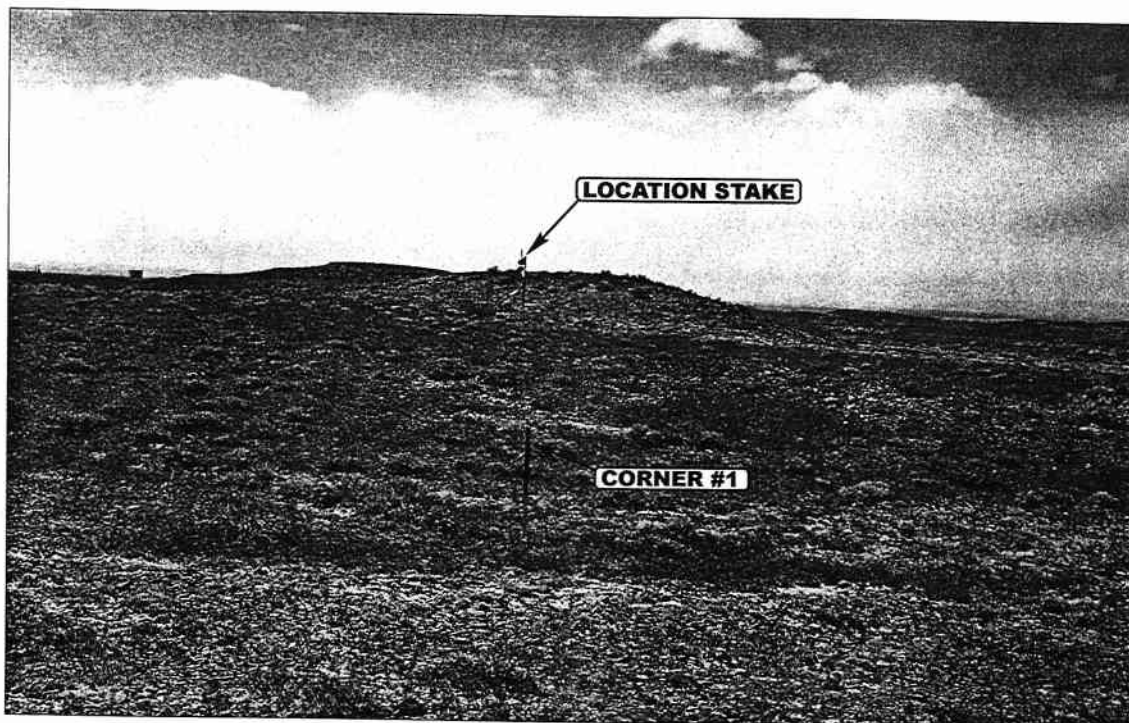


PHOTO: VIEW FROM CORNER #1 TO LOCATION STAKE

CAMERA ANGLE: WESTERLY

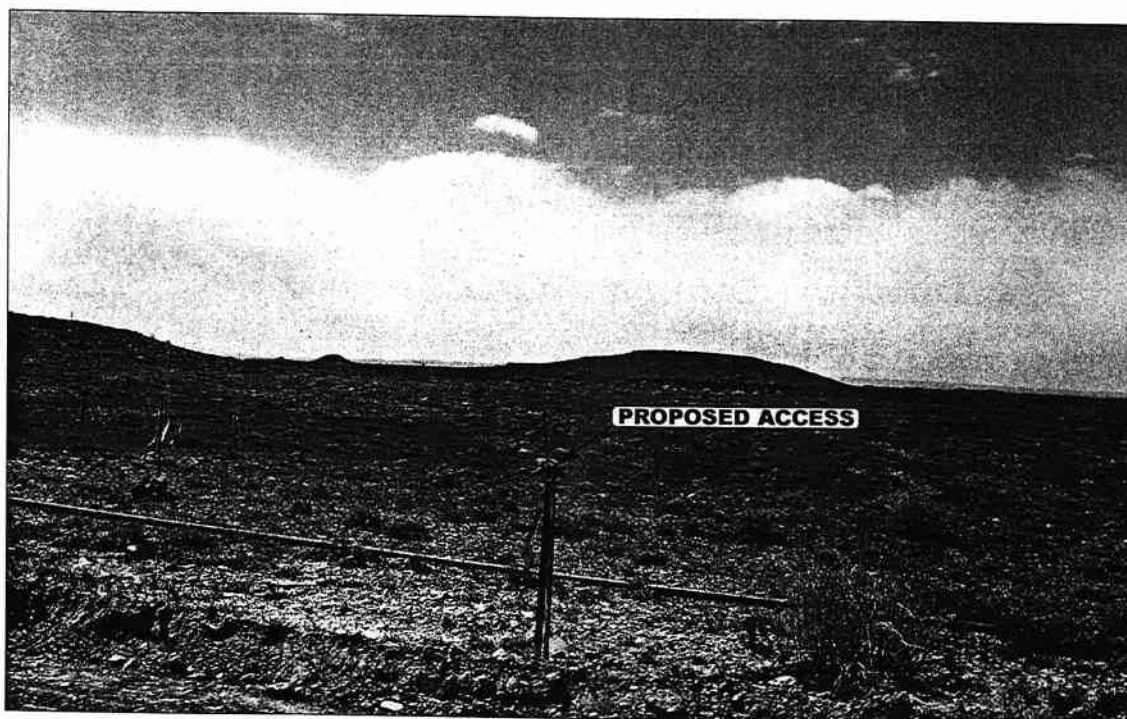


PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: WESTERLY



- Since 1964 -

UELS

Uintah Engineering & Land Surveying

85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

05 07 03
MONTH DAY YEAR


PHOTO

TAKEN BY: D.A. DRAWN BY: P.M. REVISED: 00-00-00

DOMINION EXPLR. & PROD., INC.

LOCATION LAYOUT FOR

RBU #6-10F
SECTION 10, T10S, R20E, S.L.B.&M.
1733' FNL 2490' FWL



SCALE: 1" = 50'
DATE: 05-08-03
Drawn By: D.COX

Approx.
Toe of
Fill Slope

CONSTRUCT
DIVERSION
DITCH

18" CMP
Required

Existing Road

Sta. 3+55

F-6.3'
El. 16.1'

Round Corners
as Needed

DATA

F-6.8'
El. 15.6'

Proposed Access
Road

F-7.3'
El. 15.1'

Exist.
3" R

Existing
Drainage

Existing 2" Pipeline

FLARE PIT

C-7.8'
El. 30.2'

El. 22.6'
C-8.2'
(btm. pit)

20' WIDE BENCH

C-8.6'
El. 31.0'

C-3.9'
El. 26.3'

PIPE RACKS

DOG HOUSE

Sta. 1+80

F-1.9'
El. 20.5'

Reserve Pit Backfill
& Spoils Stockpile

10' WIDE BENCH

Pit Capacity With
2' of Freeboard
is 10,040 Bbls. ±

Sta. 1+10

RESERVE PITS
(8' Deep)

El. 25.0'
C-10.6'
(btm. pit)

20' WIDE BENCH

Approx.
Top of
Cut Slope

C-5.4'
El. 27.8'

C-11.9'
El. 34.3'

Sta. 0+52

STORAGE
TANK

Sta. 0+00


C-6.5'
El. 28.9'


C-9.7'
El. 32.1'

T.S.

Elev. Ungraded Ground at Location Stake = 5026.3'
Elev. Graded Ground at Location Stake = 5022.4'

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017






DATE: 05-08-03
Drawn By: D.COX

DOMINION EXPLR. & PROD., INC.

TYPICAL CROSS SECTIONS FOR

RBU #6-10F
SECTION 10, T10S, R20E, S.L.B.&M.
1733' FNL 2490' FWL

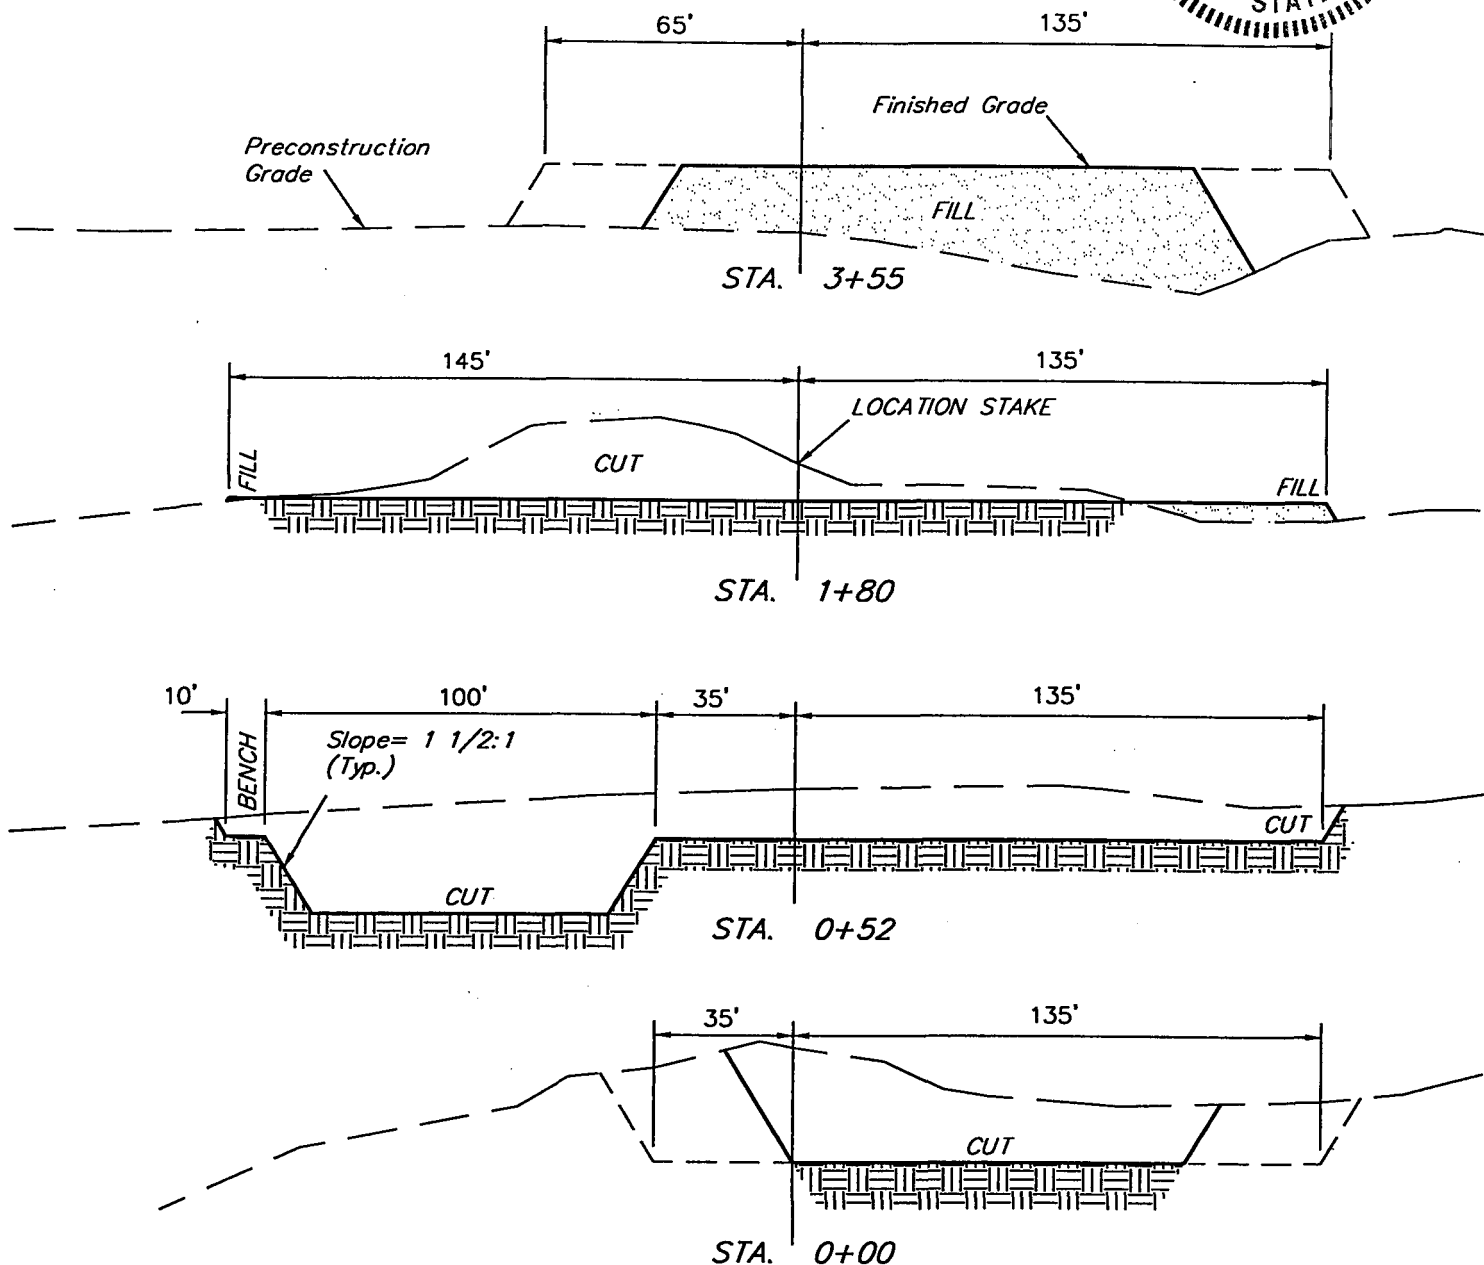

APPROXIMATE YARDAGES

CUT

(12") Topsoil Stripping = 3,140 Cu. Yds.

Remaining Location = 9,340 Cu. Yds.

TOTAL CUT = 12,480 CU.YDS.

FILL = 7,420 CU.YDS.

EXCESS MATERIAL AFTER
5% COMPACTION

= 4,670 Cu. Yds.


Topsoil & Pit Backfill
(1/2 Pit Vol.)

= 4,670 Cu. Yds.

EXCESS UNBALANCE
(After Rehabilitation)

= 0 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017

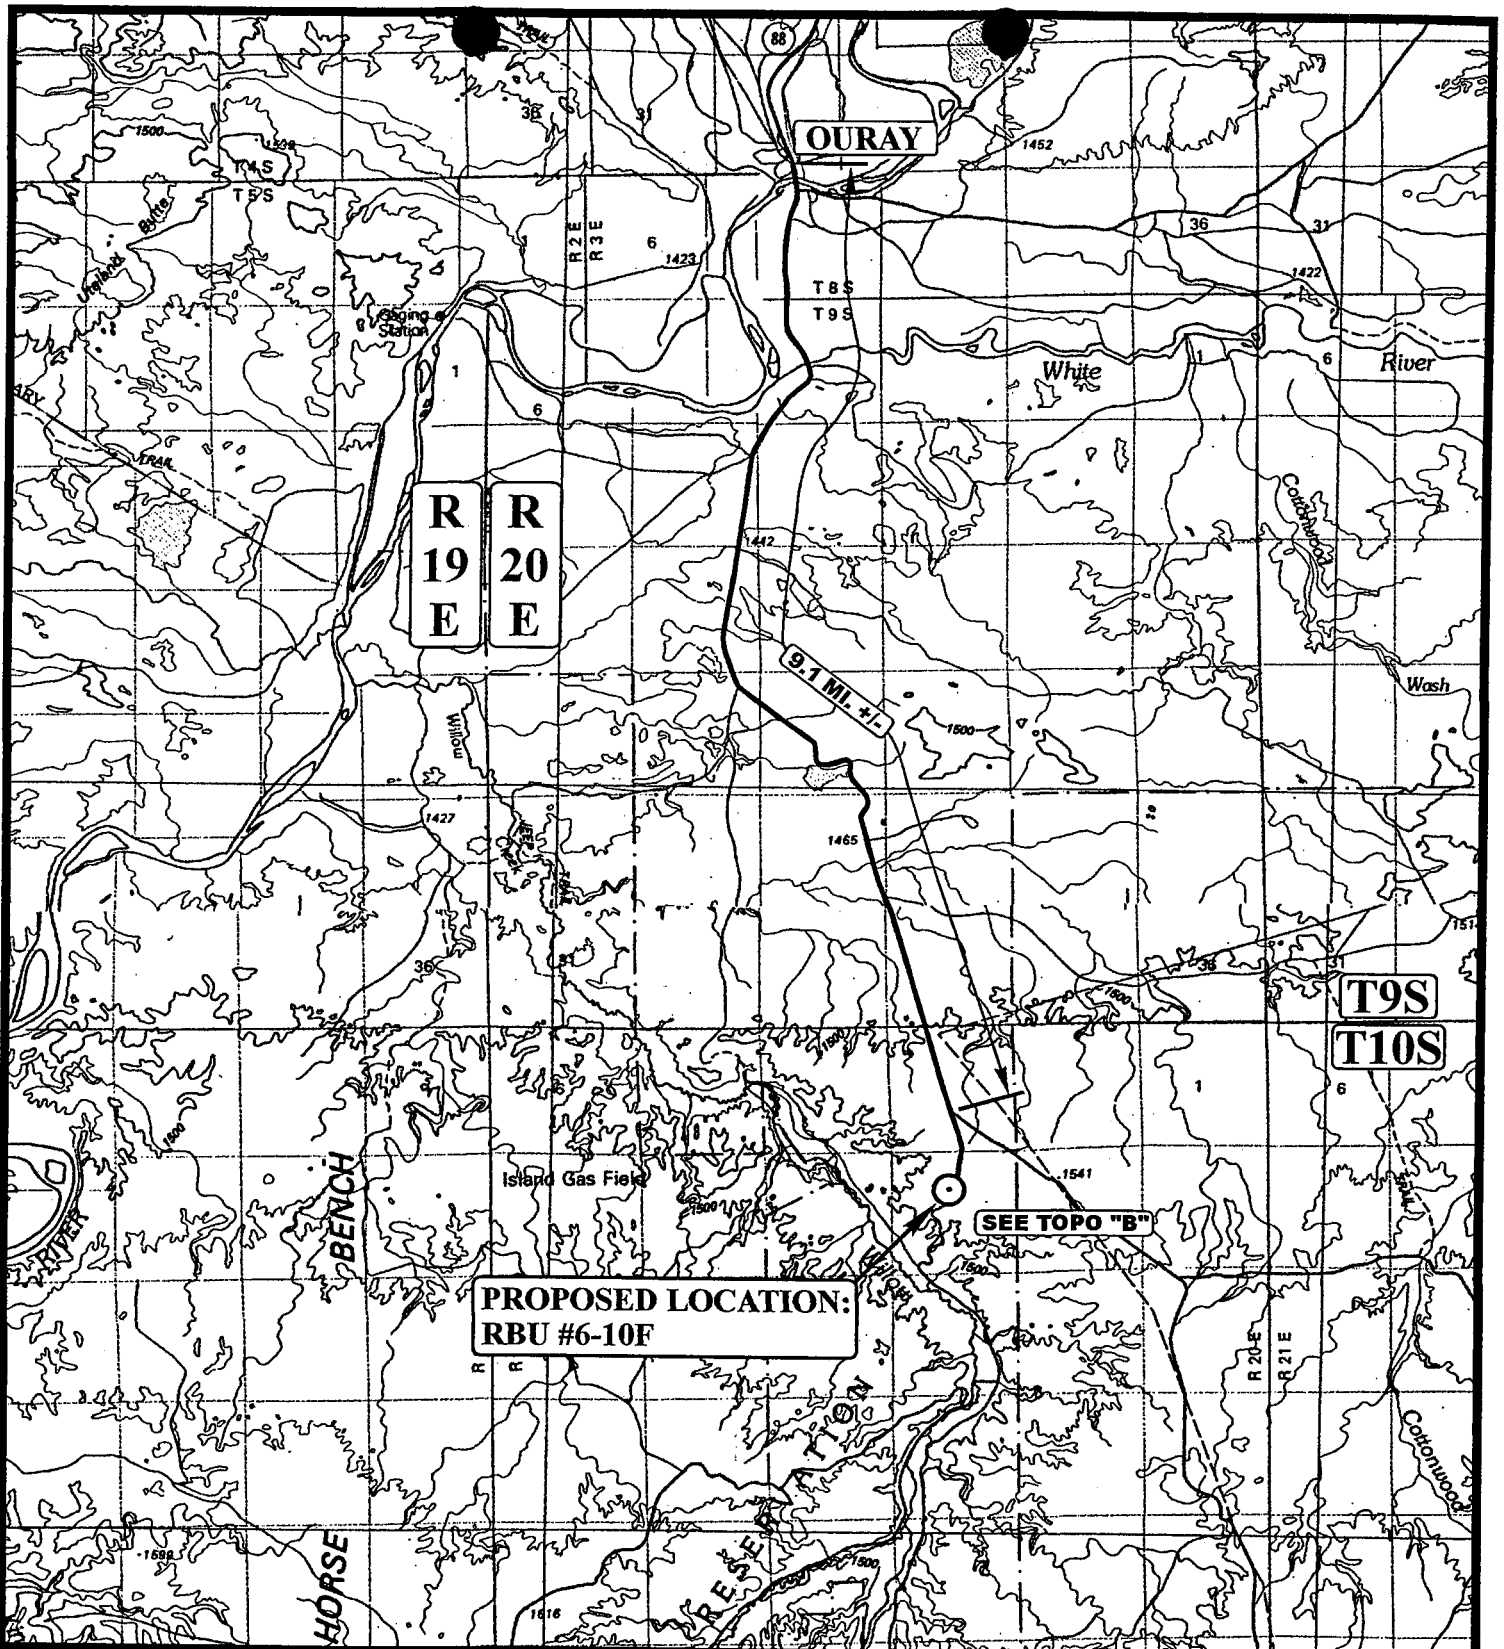

LEGEND:

○ PROPOSED LOCATION

N

DOMINION EXPLR. & PROD., INC.

RBU #6-10F

SECTION 10, T10S, R20E, S.L.B.&M.

1733' FNL 2490' FWL




Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
MAP**

05 07 03
MONTH DAY YEAR

SCALE: 1:100,000 DRAWN BY: P.M. REVISED: 00-00-00

**A
TOPO**

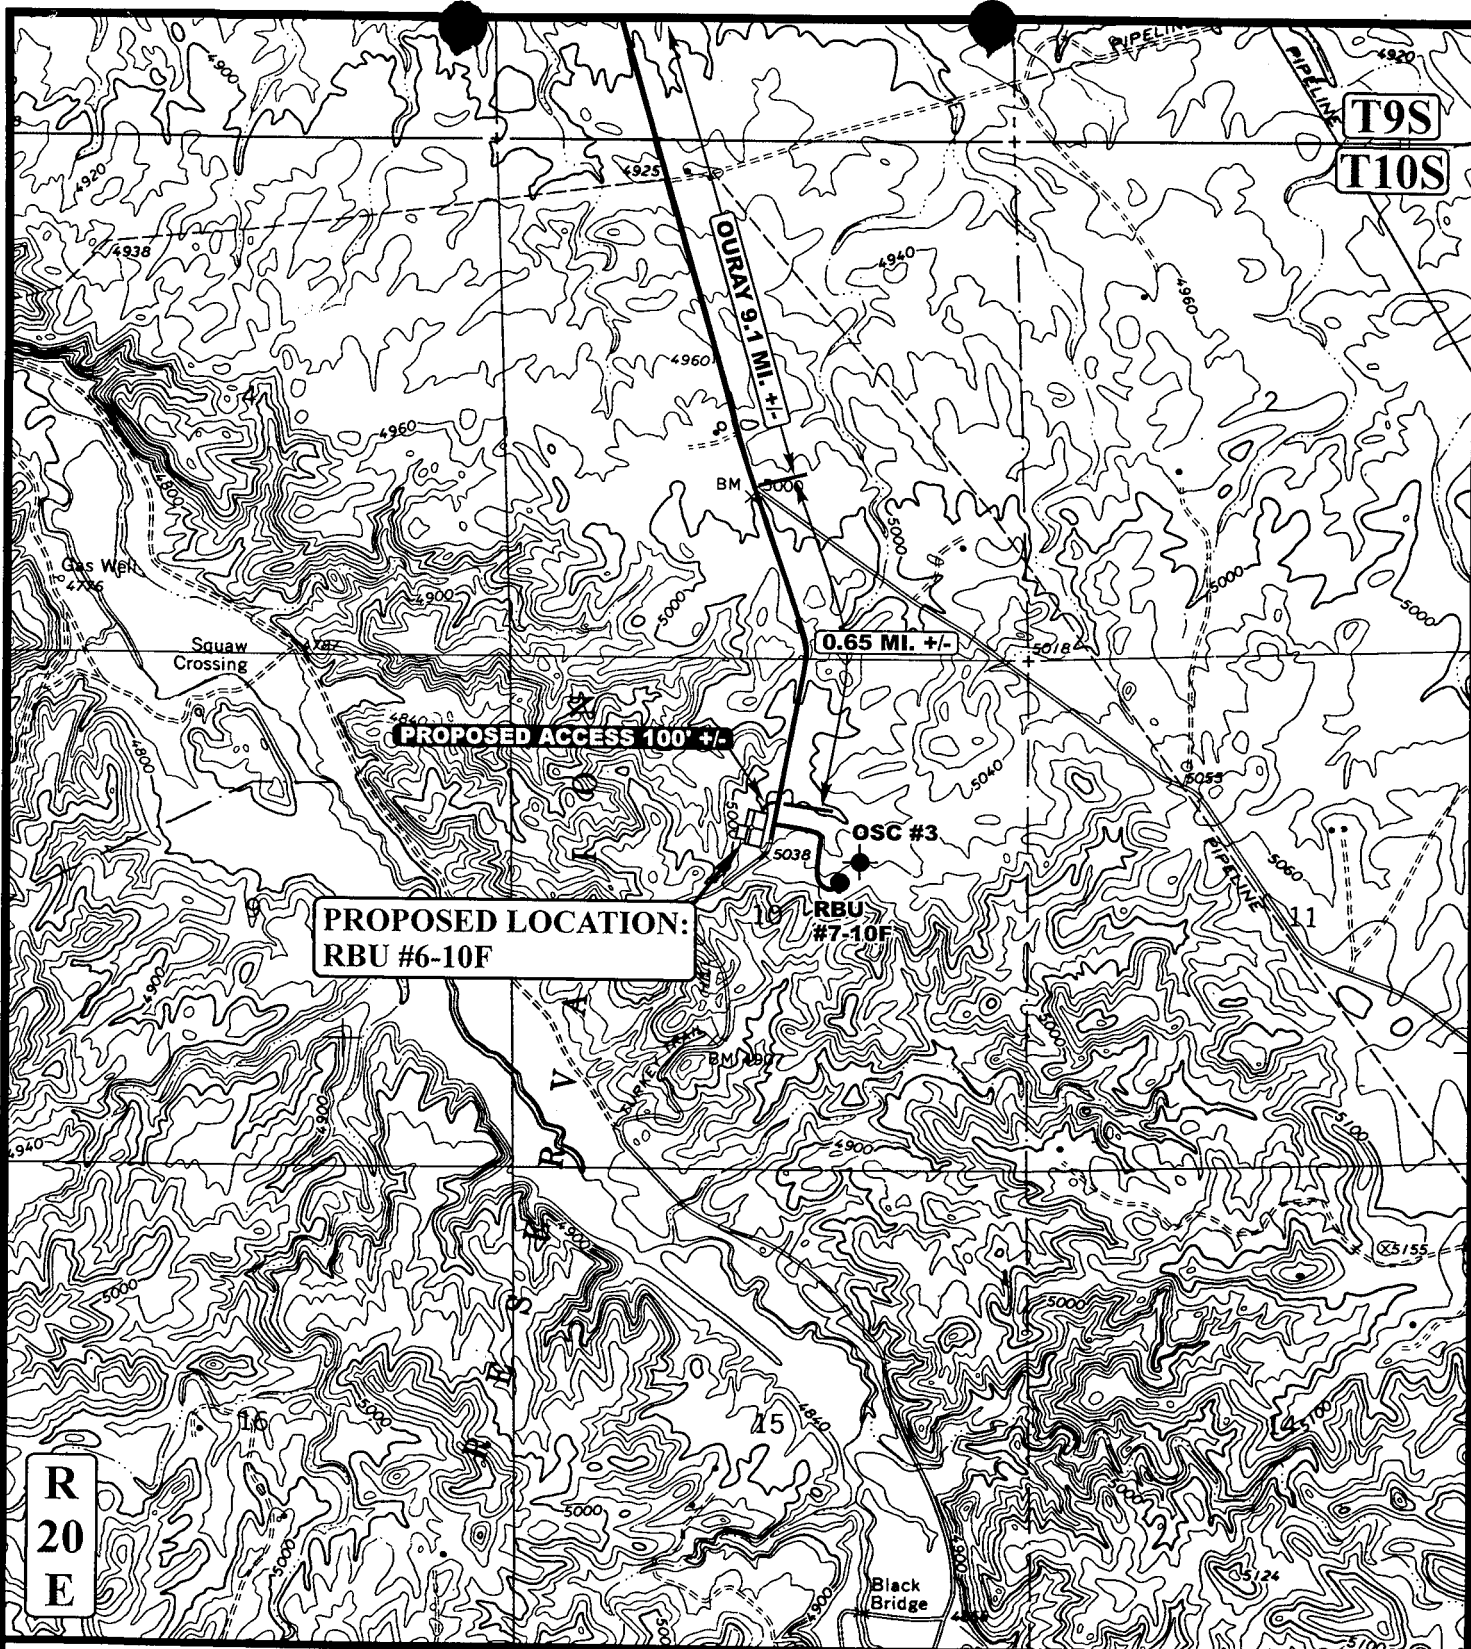

LEGEND:

————— EXISTING ROAD
 - - - - - PROPOSED ACCESS ROAD



DOMINION EXPLR. & PROD., INC.

RBU #6-10F

SECTION 10, T10S, R20E, S.L.B.&M.

1733' FNL 2490' FWL




Utah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
 MAP

05 07 03
 MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: P.M. REVISED: 00-00-00

B
 TOPO

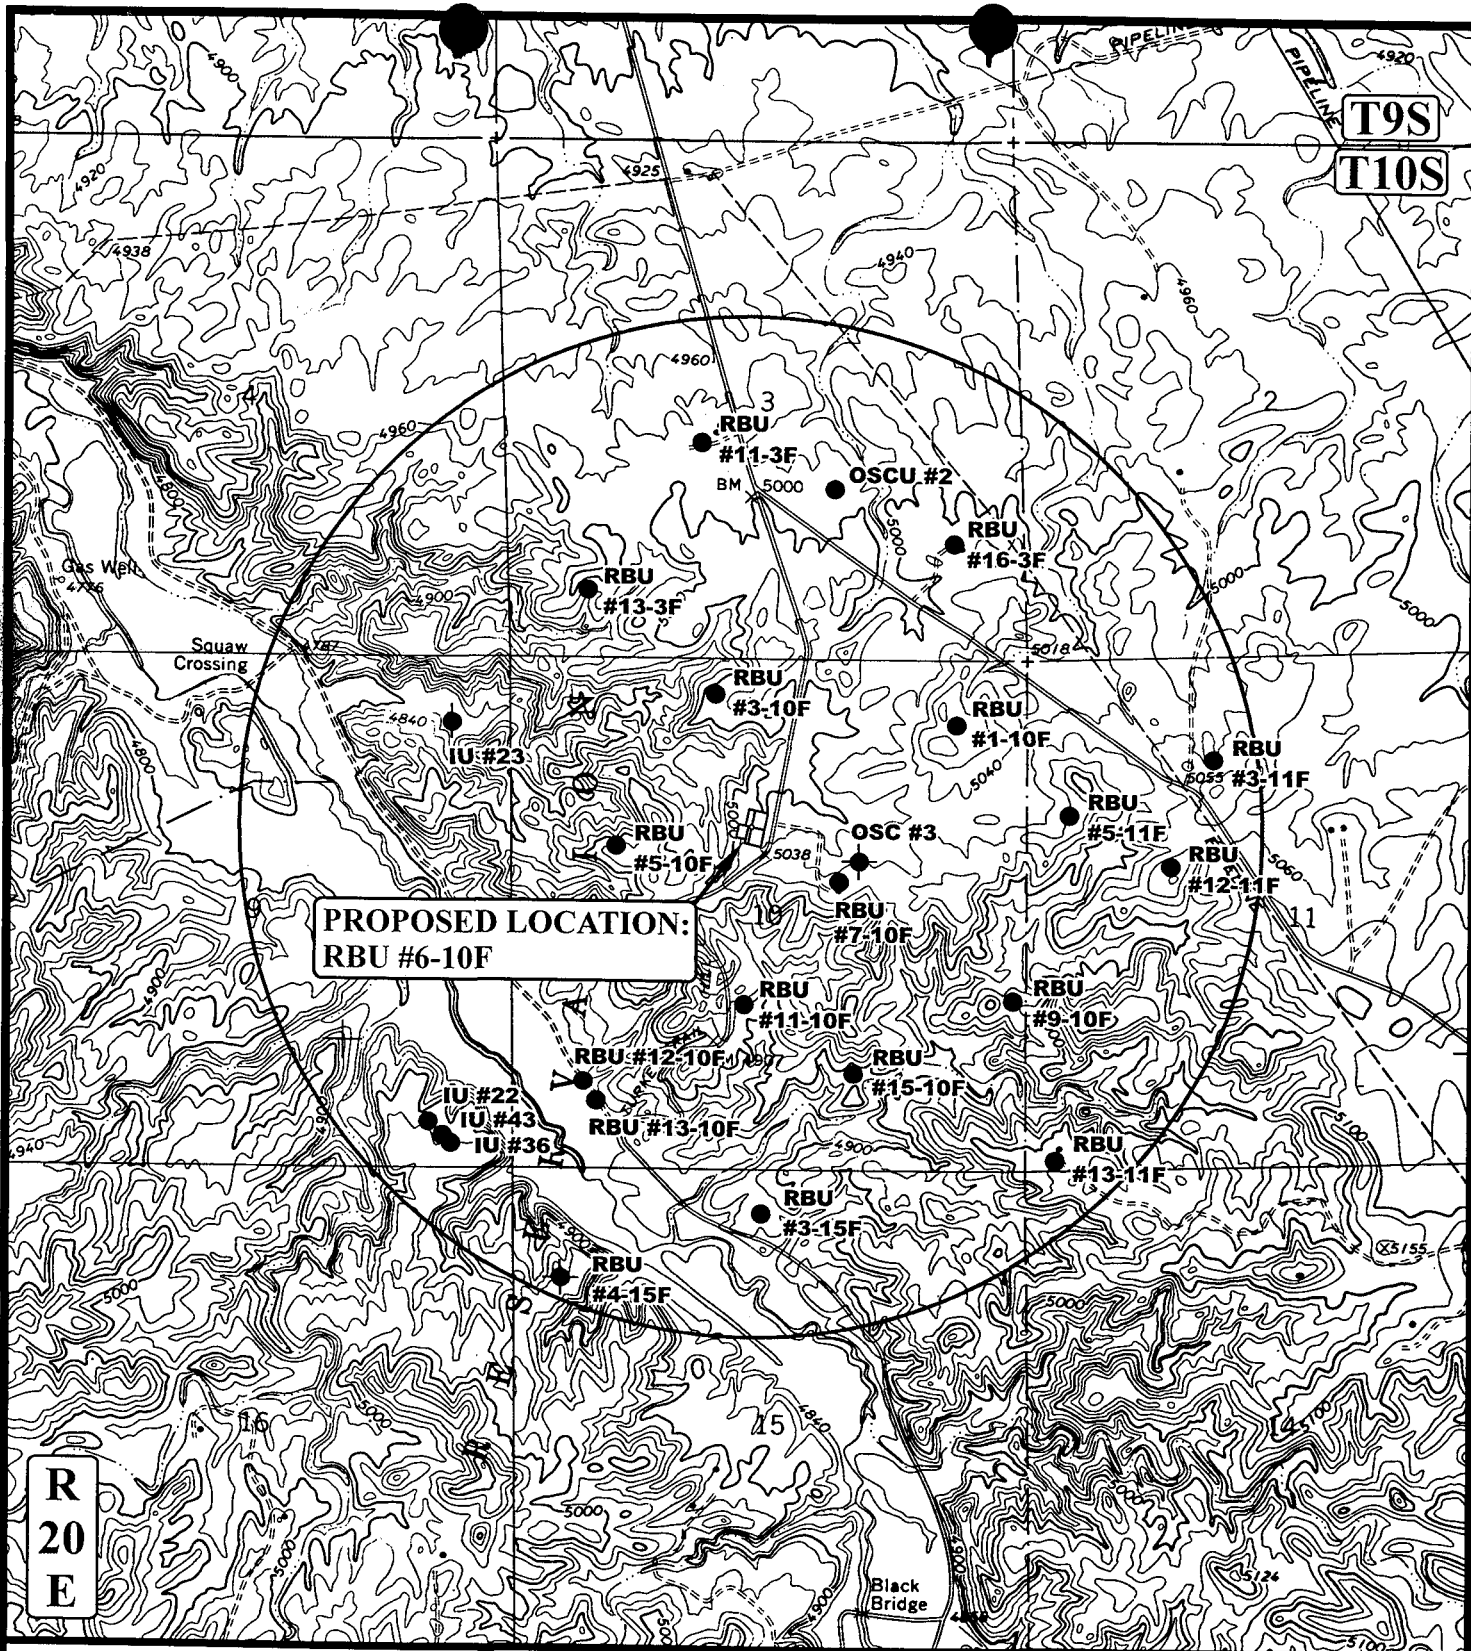

LEGEND:

- DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813





DOMINION EXPLR. & PROD., INC.

RBU #6-10F
 SECTION 10, T10S, R20E, S.L.B.&M.
 1733' FNL 2490' FWL

TOPOGRAPHIC MAP
 05 07 03
 MONTH DAY YEAR
 SCALE: 1" = 2000' DRAWN BY: P.M. REVISED: 00-00-00



T10S

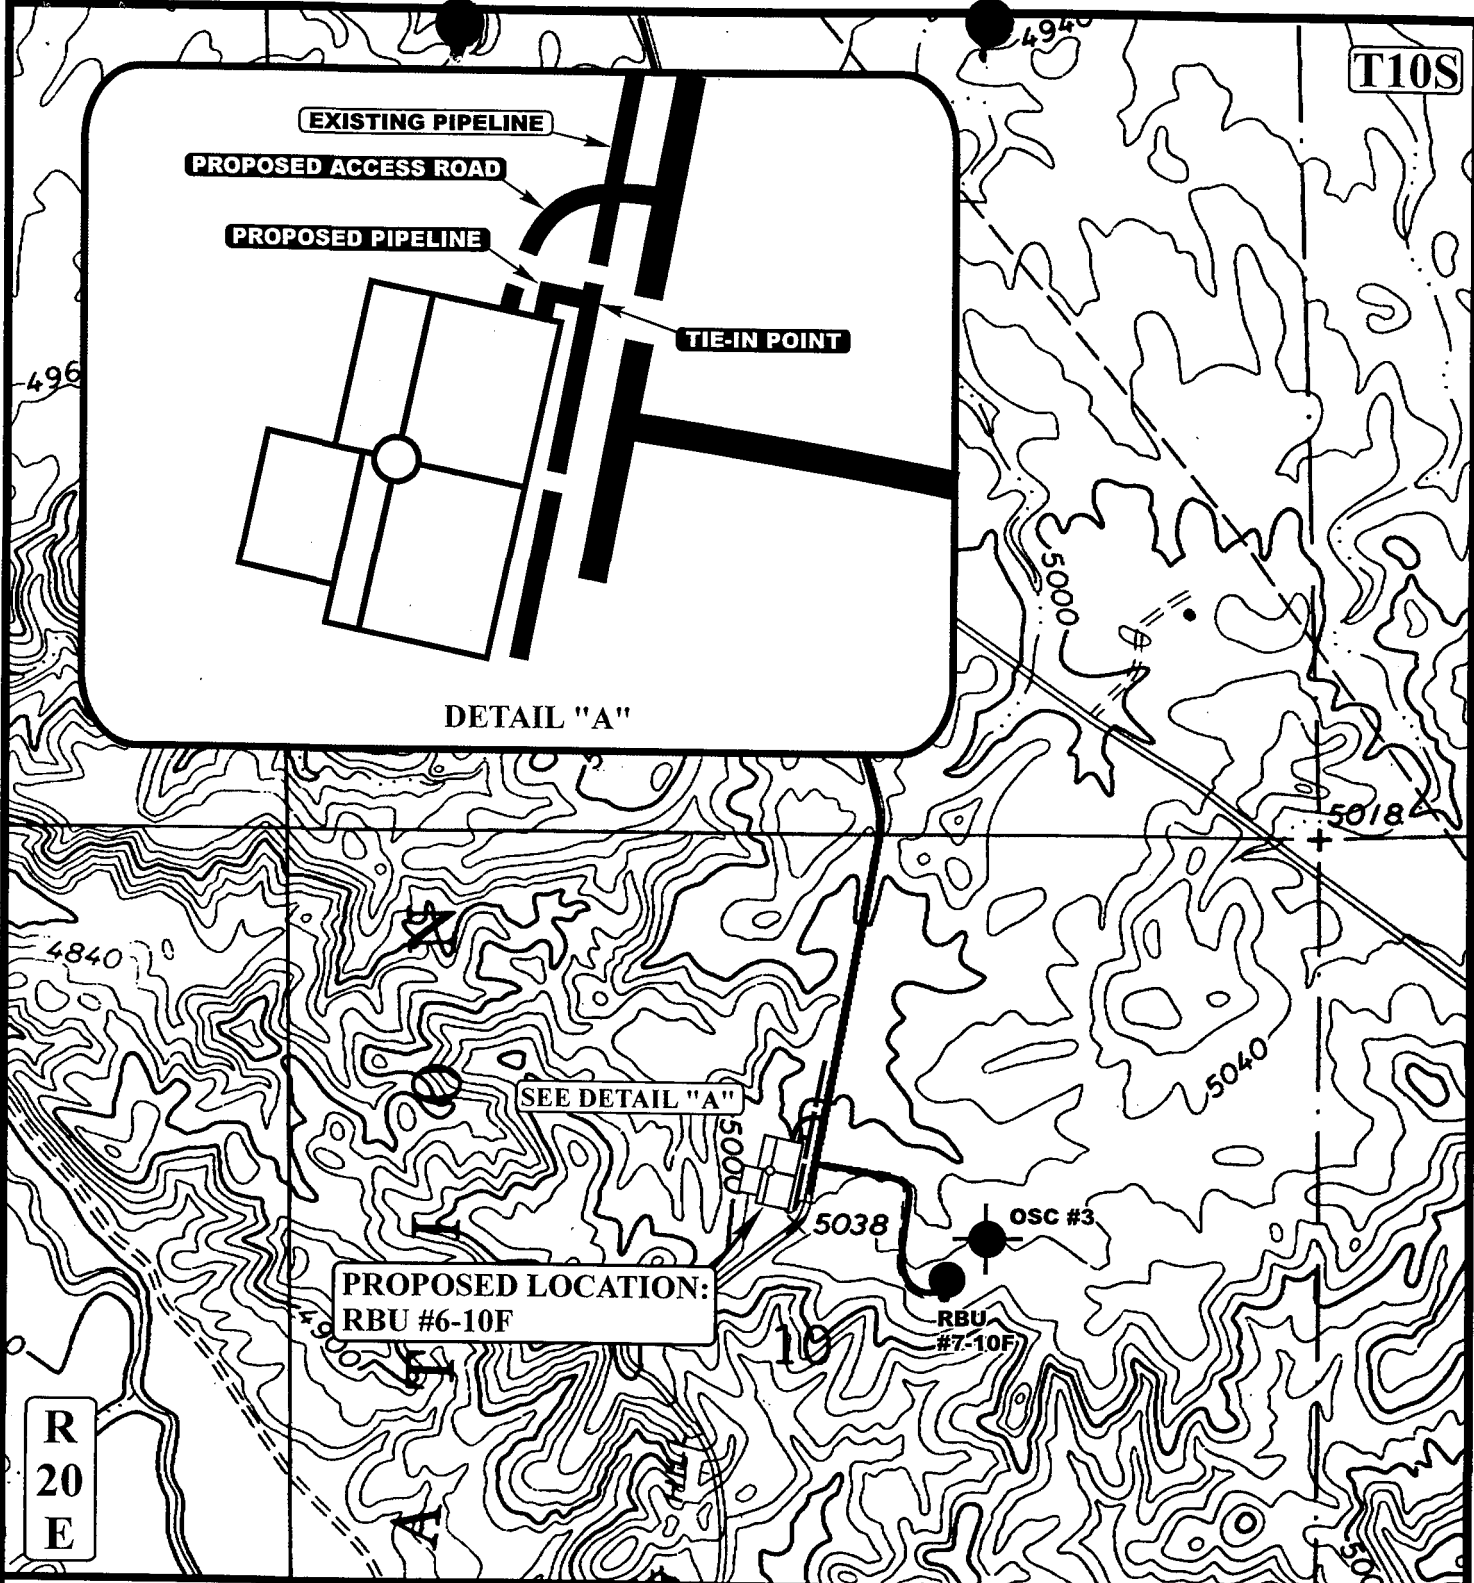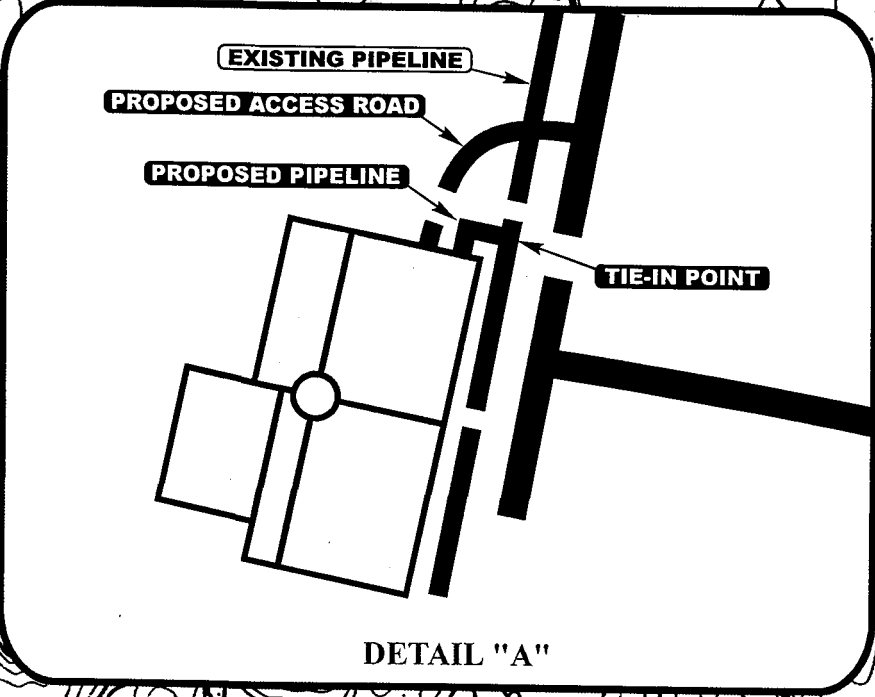

APPROXIMATE TOTAL PIPELINE DISTANCE = 40' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- PROPOSED PIPELINE

DOMINION EXPLR. & PROD., INC.

RBU #6-10F

SECTION 10, T10S, R20E, S.L.B.&M.

1733' FNL 2490' FWL



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC			05	07	03
MAP			MONTH	DAY	YEAR
SCALE: 1" = 1000'			DRAWN BY: P.M. REVISED: 00-00-00		





Attn: Diana Mason
Utah Division of Oil, Gas & Mining
1594 West North Temple, Suite 1210
Salt Lake City, Utah 84114-5801

Reference: Exception to Location & Sitting of Well
RBU 6-10F, Section 10-10S-20E
Location 1733' FNL & 2490' FWL
Uintah County, Utah

Dear Ms. Mason:

Dominion Exploration & Production, Inc. is requesting an exception to Rule 649-3-3 for the above referenced well, due to topographic considerations. The well is 920' from other wells capable of production and Dominion Exploration & Production, Inc. is the only owner within a 460' radius of the proposed well location.

If you should require additional information please feel free to contact me at (405) 749-5263.

Sincerely,

Dominion Exploration & Production, Inc.

Carla Christian
Regulatory Specialist

Enclosure

RECEIVED
AUG 11 2003
DIV. OF OIL, GAS & MINING

004

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 08/11/2003

API NO. ASSIGNED: 43-047-35128

WELL NAME: RBU 6-10F

OPERATOR: DOMINION EXPL & PROD (N1095)

CONTACT: CARLA CHRISTIAN

PHONE NUMBER: 405-749-1300

PROPOSED LOCATION:

SENW 10 100S 200E

SURFACE: 1733 FNL 2490 FWL

BOTTOM: 1733 FNL 2490 FWL

UINTAH

NATURAL BUTTES (630)

LEASE TYPE: 1 - Federal

LEASE NUMBER: U-7206

SURFACE OWNER: 2 - Indian

PROPOSED FORMATION: WSTC

INSPECT LOCATN BY: / /

Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LATITUDE: 39.96440

LONGITUDE: 109.65183

RECEIVED AND/OR REVIEWED:

- ☒ Plat
- ☒ Bond: Fed[1] Ind[] Sta[] Fee[]
(No. 76S630500330)
- ☒ Potash (Y/N)
- ☒ Oil Shale 190-5 (B) or 190-3 or 190-13
- ☒ Water Permit
(No. 43-10447)
- ☒ RDCC Review (Y/N)
(Date:)
- ☒ Fee Surf Agreement (Y/N)

LOCATION AND SITING:

R649-2-3.

Unit RIVER BEND

R649-3-2. General

Siting: 460 From Qtr/Qtr & 920' Between Wells

☒ R649-3-3. Exception

Drilling Unit

Board Cause No: _____

Eff Date: _____

Siting: _____

R649-3-11. Directional Drill


COMMENTS:

STIPULATIONS:

1- Federal approval

2- Spacing Strip

3- OIL SHALE

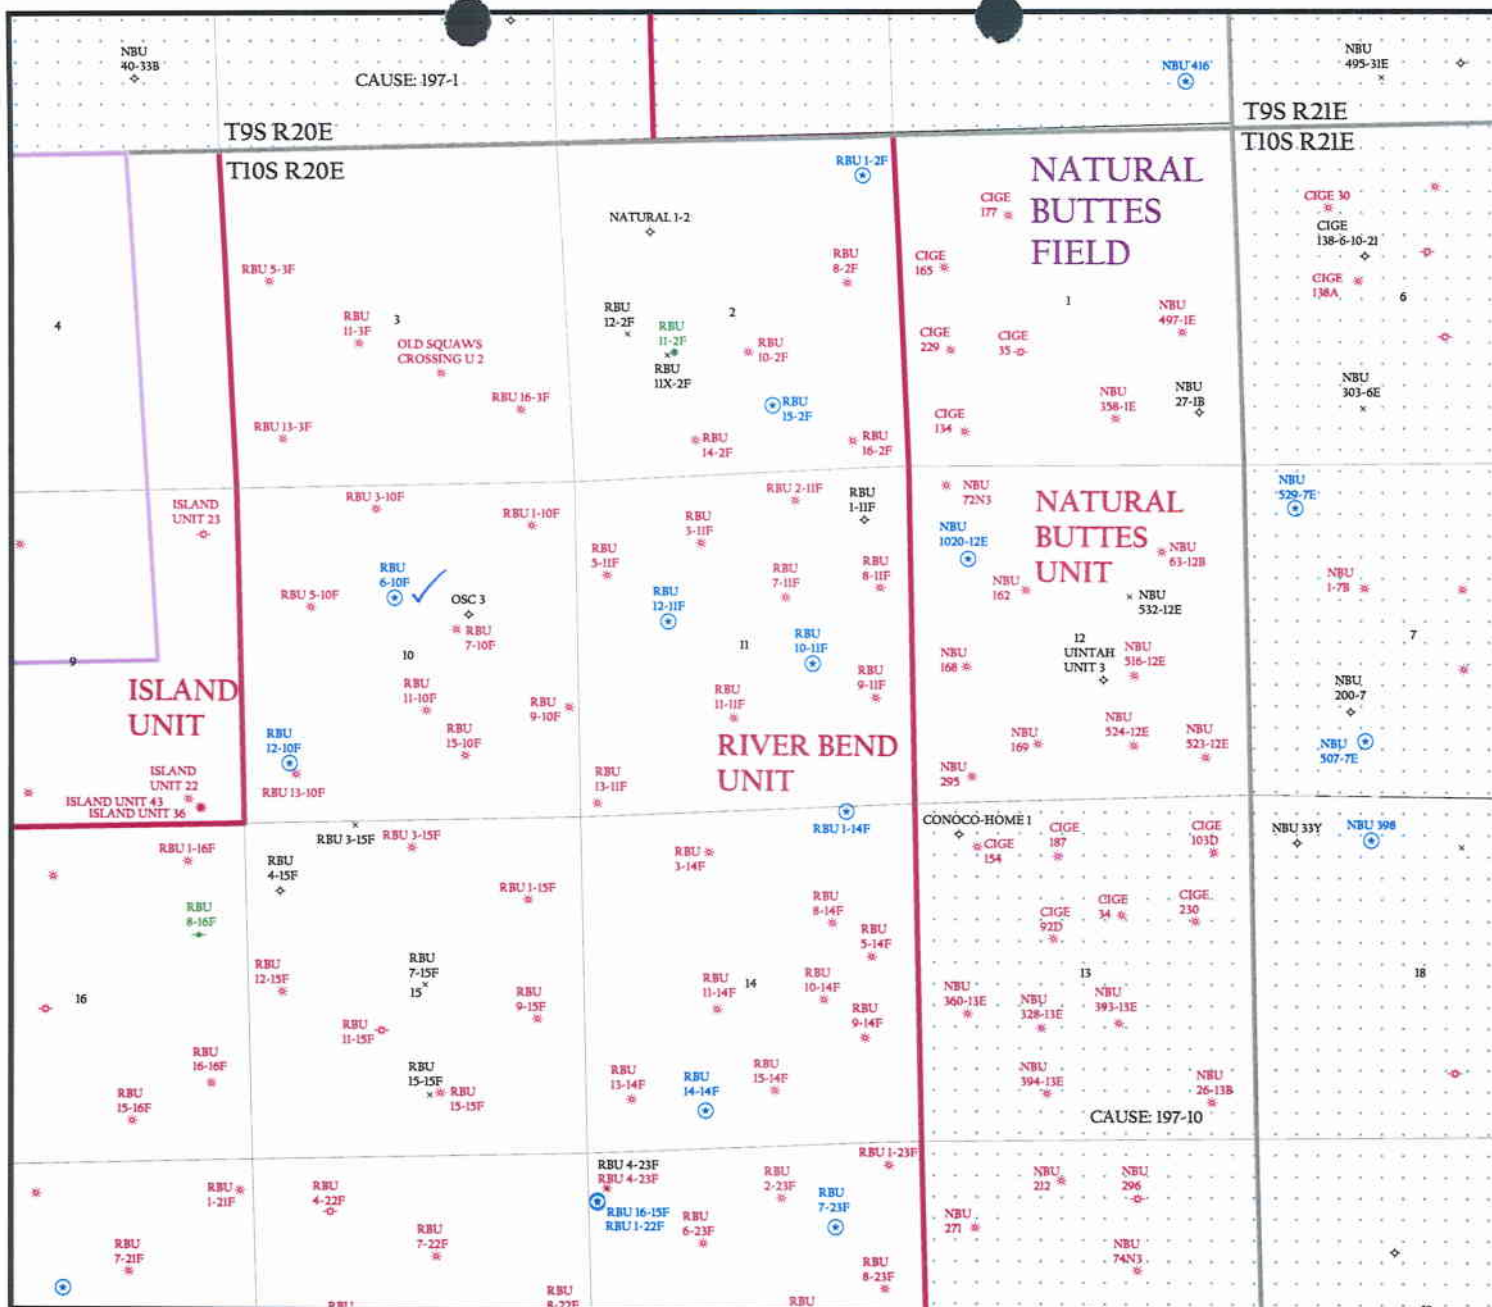

OPERATOR: DOMINION EXPL & PROD (N1095)

SEC. 10 T.10S, R.20E

FIELD: NATURAL BUTTES (630)

COUNTY: UINTAH

SPACING: R649-3-3 / EXCEPTION LOCATION

Wells


- GAS INJECTION
- GAS STORAGE
- LOCATION ABANDONED
- NEW LOCATION
- PLUGGED & ABANDONED
- PRODUCING GAS
- PRODUCING OIL
- SHUT-IN GAS
- SHUT-IN OIL
- TEMP. ABANDONED
- TEST WELL
- WATER INJECTION
- WATER SUPPLY
- WATER DISPOSAL

Unit Status

- EXPLORATORY
- GAS STORAGE
- NF PP OIL
- NF SECONDARY
- PENDING
- PI OIL
- PP GAS
- PP GEOTHERMAL
- PP OIL
- SECONDARY
- TERMINATED

Field Status

- ABANDONED
- ACTIVE
- COMBINED
- INACTIVE
- PROPOSED
- STORAGE
- TERMINATED

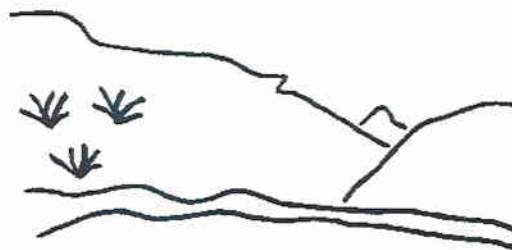

Utah Oil Gas and Mining



PREPARED BY: DIANA MASON
DATE: 13-AUGUST-2003

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office

P.O. Box 45155

Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:

3160

(UT-922)

August 15, 2003

Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2003 Plan of Development River Bend Unit,
Uintah County, Utah.

Pursuant to email between Diana Mason, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management. The following well is planned for calendar year 2003 within the River Bend Unit, Uintah County, Utah.

Api Number	Well	Location
(Proposed PZ Wasatch)		
43-047-35128	RBU 6-10F Sec 10 T10S R20E	1733 FNL 2490 FWL
43-047-35129	RBU 6-21F Sec 21 T10S R20E	1916 FNL 2251 FWL

This office has no objection to permitting the well at this time.

/s/ Michael L. Coulthard

bcc: File - River Bend Unit
Division of Oil Gas and Mining
Agr. Sec. Chron
Fluid Chron

MCoulthard:mc:8-15-3



State of Utah
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

1594 West North Temple, Suite 1210
PO Box 145801
Salt Lake City, Utah 84114-5801
(801) 538-5340 telephone
(801) 359-3940 fax
(801) 538-7223 TTY
www.nr.utah.gov

Michael O. Leavitt
Governor

Robert L. Morgan
Executive Director

Lowell P. Braxton
Division Director

August 18, 2003

Dominion Exploration & Production, Inc.
14000 Quail Springs Parkway, Suite 600
Oklahoma City, UT 73134

Re: River Bend Unit 6-10F Well, 1733' FNL, 2490 FWL, SE NW, Sec. 10, T. 10 South,
R. 20 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

Appropriate information has been submitted to DOGM and administrative approval of the requested exception location is hereby granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-35128.

Sincerely,

A handwritten signature in dark ink, appearing to read 'John R. Baza'.

John R. Baza
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: Dominion Exploration & Production, Inc.
Well Name & Number River Bend Unit 6-10F
API Number: 43-047-35128
Lease: U-7206

Location: SE NW **Sec.** 10 **T.** 10 South **R.** 20 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

6. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. U-7206	
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE		6. If Indian, Allottee or Tribe Name Ute Indian Tribe	
2. Name of Operator Dominion Exploration & Production, Inc.		7. If Unit or CA Agreement, Name and No. River Bend Unit	
3a. Address 14000 Quail Spgs Parkway, Okla. City, OK 73134		8. Lease Name and Well No. RBU 6-10F	
3b. Phone No. (include area code) 405-749-1300		9. API Number 43-047-35128	
4. Location of Well (Report location clearly and in accordance with any state requirements.) At surface 1733' FNL & 2490' FWL, SE/NW At proposed prod. zone		10. Field and Pool, or Exploratory Natural Buttes	
14. Distance in miles and direction from nearest town or post office* 9.75 miles South of Ouray		11. Sec., T., R., M., or Blk and Survey or Area 10-10S-20E	
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 1733'	16. No. of Acres in lease 1800	17. Spacing Unit dedicated to this well 40	
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 1026'	19. Proposed Depth 7100'	20. BLM/BIA Bond No. on file 76S 63050 0330	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5026'	22. Approximate date work will start* 01-Jul-04	23. Estimated duration 45 days	

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).

4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification.
6. Such other site specific information and/or plans as may be required by the authorized officer.

RECEIVED

JAN 22 2004

DIV OF OIL, GAS & MINING

25. Signature <i>Carla Christian</i>	Name (Printed/Typed) Carla Christian	Date August 7, 2003
Title Regulatory Specialist		
Approved by (Signature) <i>William J. Feksmar</i>	Name (Printed/Typed) WILLIAM J FEKSMAR	Date 1/14/04
Assistant Field Manager Mineral Resources	Office	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

UPOG/M
73PS0592A

nos 08/08/03

NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED

CONDITIONS OF APPROVAL
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Dominion E&P Inc..

Well Name & Number: River Bend Unit 6-10F

API Number: 43-047-35128

Lease Number: U-7206

Location: SENW Sec. 10 T.10S R. 20E

Agreement: River Bend Unit

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

CONDITIONS OF APPROVAL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

A. DRILLING PROGRAM

1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands to John Mayers of this office **prior to setting the next casing string or requesting plugging orders**. Faxed copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

2. Pressure Control Equipment

The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc., for a **3M** system and individual components shall be operable as designed. Chart recorders shall be used for all pressure tests.

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

3. Casing Program and Auxiliary Equipment

As a minimum requirement, the cement behind the production casing must extend at least 200' above the top of the fresh water identified at $\pm 4790'$.

4. Mud Program and Circulating Medium

None

5. Coring, Logging and Testing Program

A cement bond log (CBL) will be run from the production casing shoe to the top of cement or the intermediate casing shoe whichever is lower.

Please submit to this office, in LAS format, an electronic copy of all logs run on this well This submission will replace the requirement for submittal of paper logs to the BLM.

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

6. Notifications of Operations

Operator shall report production data to MMS pursuant to 30 CFR 216.5 using form MMS/3160.

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.
All off-lease storage, off-lease measurement, or commingling onlease or off-lease will have prior written approval from the AO.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries and tested for meter accuracy at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office. All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, you must contact one of the following individuals:

Ed Forsman (435) 828-7874
Petroleum Engineer

BLM FAX Machine (435) 781-4410

Kirk Fleetwood (435) 828-7875
Petroleum Engineer

EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

Unused fracturing fluids or acids

Gas plant cooling tower cleaning wastes

Painting wastes

Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spent solvents, spilled chemicals, and waste acids

Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste

Refinery wastes

Liquid and solid wastes generated by crude oil and tank bottom reclaimers

Used equipment lubrication oils

Waste compressor oil, filters, and blowdown

Used hydraulic fluids

Waste solvents

Waste in transportation pipeline-related pits

Caustic or acid cleaners

Boiler cleaning wastes

Boiler refractory bricks

Incinerator ash

Laboratory wastes

Sanitary wastes

Pesticide wastes

Radioactive tracer wastes

Drums, insulation and miscellaneous solids.

**SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

Dominion Exploration and Production, Inc. (Dominion) will assure the Ute Tribe that any/all contractors and subcontractors have acquired a current Tribal Business License and have updated "Access Permits" prior to construction. All Dominion personnel, contractors and subcontractors will have these permits in their vehicles at all times. Companies that have not complied with this COA will be in violation of the Ute Tribal Business License Ordinance, and will be subject to fines and penalties.

Dominion employees, representatives, and/or authorized personnel (subcontractors) shall not carry firearms on their person or in their vehicles while working on the Uintah and Ouray Indian Reservation.

Dominion employees and/or authorized personnel (subcontractors) in the field will have approved applicable APDs and/or ROW permits/authorizations on their person(s) during all phases of construction.

Dominion will notify the Ute Tribe and Bureau of Indian Affairs (BIA) in writing of any requested modification of APDs or Rights-Of Way (ROW). Dominion shall receive written notification of authorization or denial of the requested modification. Without authorization, Dominion will be subject to fines and penalties.

The Ute Tribe Energy & Minerals Department shall be notified in writing 48 hours in advance of any construction activity. The Ute Tribal office is open Monday through Thursday. A Tribal Technician is to routinely monitor construction. Dominion shall make arrangements with the Ute Energy & Minerals Department for all monitoring that will exceed regular working hours for Tribal Technicians. A qualified archaeologist accompanied by a Tribal Technician will monitor any trenching construction of the pipeline.

A corridor ROW, 30 feet wide and 53 feet long, shall be granted by BIA for the new access road. The pipeline connection tie-in point is adjacent to the proposed pad. The constructed, travel width of the access road will be limited to 18 feet. Upon authorization by the Ute Tribe Energy & Minerals Department, the ROW may be wider where sharp curves; deep cuts and fills occur; or, where intersections with other roads are required.

Culverts and diversion ditches will be placed and constructed where needed. Road base gravel will be used where sandy soils make roadways and the drilling location hazardous for access or drilling operations.

Upon completion of the pertinent APD and ROWs, Dominion will notify the Ute Tribe Energy & Minerals Department for a Tribal Technician to verify the Affidavit of Completion.

Production waters, oil, and other byproducts shall not be placed on access roads or the well pad.

All vehicular traffic, personnel movement, construction and restoration operations will be confined to the areas examined and approved and to the existing roadways and/or evaluated access routes.

Dominion will implement "Safety and Emergency Plan" and ensure plan compliance.

Dominion shall stop construction activities and notify personnel from the Ute Tribe Energy & Minerals Department and BIA if cultural remains including paleontology resources (vertebrate fossils) are exposed or identified during construction. The Ute Tribe Department of Cultural Rights and Protection and the BIA will provide mitigation measures prior to allowing construction.

Dominion employees and/or authorized personnel (subcontractors) will not be allowed to collect artifacts and paleontology fossils. No significant cultural resources shall be disturbed.

Dominion will control noxious weeds on the well site and ROWs. Dominion will be responsible for noxious weed control if weeds spread from the project area onto adjoining land.

Reserve pits will be lined with an impervious synthetic liner. A fence will be constructed around the reserve pit until it is backfilled. Prior to backfilling the reserve pit, all fluids will be pumped from the pit into trucks and hauled, to approved disposal sites. When the reserve pits are backfilled, the surplus oil and mud, etc., will be buried a minimum of 3 feet below the surface of the soil.

A closed system will be used during production. This means that production fluids will be contained in leak-proof tanks. All production fluids will be disposed of at approved disposal sites.

Surface pipelines will be constructed to lay on the soil surface. The pipeline portion of the ROW will not be bladed or cleared of vegetation without authorization of the BIA. Surface pipelines shall be welded in place at well sites or on access roads. They shall be pulled into place and assembled with suitable equipment. Vehicles shall not use pipeline ROWs as access roads unless specifically authorized.

Buried pipelines shall be buried a minimum of 3 feet below the soil surface. After construction is completed the disturbed area shall be contoured to blend into the natural landscape and be reseeded between September 15 and November 1 of the year following construction with perennial vegetation seed mixture provided by the BIA or Ute Tribe.

Before the site is abandoned, Dominion will be required to restore the well site and ROWs to near their original state. The disturbed areas will be reseeded with desirable perennial vegetation.

Soil erosion will be mitigated, by reseeded all disturbed areas.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

008

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

5. Lease Serial No.
U-7206

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
RBU 6-10F

9. API Well No.
43-047-35128

10. Field and Pool, or Exploratory
NATURAL BUTTES

11. County or Parish, and State
UINTAH COUNTY, UT

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

DOMINION EXPL. & PROD., INC.

Contact:

CARLA CHRISTIAN

E-Mail: Carla_M_Christian@dom.com

3a. Address

14000 QUAIL SPRINGS PARKWAY, SUITE 600
OKLAHOMA CITY, OK 73134

3b. Phone No. (include area code)

Ph: 405.749.5263

Fx: 405.749.6690

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Sec 10 T10S R20E SENW 1733FNL 2490FWL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Change to Original A
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	PD

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

The State APD for this well expires August 18 2004. Dominion is hereby requesting a one year extension. Dominion would also like to eliminate the 13 3/8" surface casing and change the TD as reflected in the attached new drilling plan.

**Approved by the
Utah Division of
Oil, Gas and Mining**

COPY SENT TO OPERATOR

Date: 8-25-04
Initials: CHD

Date:

By:

RECEIVED

AUG 06 2004

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #33995 verified by the BLM Well Information System
For DOMINION EXPL. & PROD., INC., sent to the Vernal

Name (Printed/Typed) CARLA CHRISTIAN

Title AUTHORIZED REPRESENTATIVE

Signature

(Electronic Submission)

Date 08/03/2004

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ****

Federal Approval of this
is Necessary

DRILLING PLAN

APPROVAL OF OPERATIONS

Attachment for Permit to Drill

Name of Operator: Dominion Exploration & Production
Address: 14000 Quail Springs Parkway, Suite 600
Oklahoma City, OK 73134
Well Location: RBU 6-10F
1733' FNL & 2490' FWL
Section 10-10S-20E
Uintah County, UT

1. GEOLOGIC SURFACE FORMATION Uintah

2. ESTIMATED DEPTHS OF IMPORTANT GEOLOGIC MARKERS

<u>Formation</u>	<u>Depth</u>
Green River	1,367'
Wasatch Tongue	4,277'
Green River Tongue	4,607'
Wasatch	4,767'
Chapita Wells	5,667'
Uteland Buttes	6,867'

3. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS

<u>Formation</u>	<u>Depth</u>	<u>Type</u>
Green River	1,367'	Oil
Wasatch Tongue	4,277'	Oil
Green River Tongue	4,607'	Oil
Wasatch	4,767'	Gas
Chapita Wells	5,667'	Gas
Uteland Buttes	6,867'	Gas

4. PROPOSED CASING PROGRAM

All casing used to drill this well will be new casing.

<u>Type</u>	<u>Size</u>	<u>Weight</u>	<u>Grade</u>	<u>Conn.</u>	<u>Top</u>	<u>Bottom</u>	<u>Hole</u>
Surface	8-5/8"	32.0 ppf	J-55	STC	0'	2,000'	12-1/4"
Production	5-1/2"	17.0 ppf	MAV-80	LTC	0'	8,600'	7-7/8"

Note: The drilled depth of the surface hole and the setting depth of the surface casing may vary from 1,700' to 2,000'. Should a lost circulation zone be encountered while drilling, casing will be set approximately 300' below the lost circulation zone. If no lost circulation zone is encountered, casing to be set at 2,000'±.

DRILLING PLAN

APPROVAL OF OPERATIONS

5. OPERATOR'S MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL

Surface hole: No BOPE will be utilized. Air foam mist, rotating head and diverter system will be utilized.

Production hole: Prior to drilling out the surface casing shoe, 3,000 psi or greater BOP equipment will be installed. The pipe rams will be operated at least once per day from intermediate casing to total depth. The blind rams will be tested once per day from intermediate casing to total depth if operations permit.

A diagram of the planned BOP equipment for normal drilling operations in this area is attached. As denoted there will be two valves and one check valve on the kill line, two valves on the choke line, and two adjustable chokes on the manifold system. The BOP "stack" will consist of two BOP rams (1 pipe, 1 blind) and one annular type preventer, all rated to a minimum of 3,000 psi working pressure.

The BOP equipment will be pressure tested prior to drilling below the intermediate casing shoe. All test pressures will be maintained for fifteen (15) minutes without any significant pressure decrease. Clear water will be circulated into the BOP stack and lines prior to pressure testing. The following test pressures will be used as a minimum for various equipment items.

1.	Annular BOP	1,500 psi
2.	Ram type BOP	3,000 psi
3.	Kill line valves	3,000 psi
4.	Choke line valves and choke manifold valves	3,000 psi
5.	Chokes	3,000 psi
6.	Casing, casinghead & weld	1,500 psi
7.	Upper kelly cock and safety valve	3,000 psi
8.	Dart valve	3,000 psi

6. MUD SYSTEMS

- An air or an air/mist system may be used to drill to the surface hole until water influx becomes too great.
- KCL mud system will be used to drill well.

<u>Depths</u>	<u>Mud Weight (ppg)</u>	<u>Mud System</u>
0' – 2,000'	8.4	Air foam mist, rotating head and diverter
2,000' – 8,600'	8.6	Fresh water/2% KCL/KCL mud system

7. BLOOIE LINE

- An automatic igniter will not be installed on blooie line. The blooie will have a constant ignition source.
- A "target tee" connection will be installed on blooie line for 90° change of directions for abrasion resistance.
- "Target tee" connections will be a minimum of 50' from wellhead.
- The blooie line discharge will be a minimum of 100' from the wellhead.

8. AUXILIARY EQUIPMENT TO BE USED

- a. Kelly cock.
- b. Full opening valve with drill pipe connection will be kept on floor. Valve will be used when the kelly is not in string.

9. TESTING, LOGGING, AND CORING PROGRAMS TO BE FOLLOWED

- A drillstem test in the Wasatch Tongue is possible.
- One electric line wire-log will be run from total depth to surface casing.
- The gamma ray will be left on to record from total depth to surface casing.
- Other log curves (resistivities, porosity, and caliper) will record from total depth to surface casing.
- A dipmeter, percussion cores, or rotary cores may be run over selected intervals.

10. ANTICIPATED ABNORMAL PRESSURES OR TEMPERATURES EXPECTED

- Expected BHP 1,500–2,000 psi (lower than normal pressure gradient).
- No abnormal temperature or pressures are anticipated.
- The formations to be penetrated do not contain known H₂S gas.

DRILLING PLAN

APPROVAL OF OPERATIONS

11. WATER SUPPLY

- No water pipelines will be laid for this well.
- No water well will be drilled for this well.
- Drilling water for this will be hauled on the road(s) shown in Attachment No. 3.
- Water will be hauled from: Water Permit # 43-10447 Section 9, Township 8 South, Range 20 East

12. CEMENT SYSTEMS

a. Surface Cement:

- Drill 12-1/4" hole to 2,000'±, run and cement 8-5/8" to surface (depth to vary based on depth of lost circulation zone).
- Pump 20 bbls lightly weighted water spacer followed by 5 bbls fresh water. Displace with any available water.
- Casing to be run with: a) guide shoe b) insert float c) three (3) centralizers, one on each of first 3 joints d) stop ring for plug two joints off bottom e) bottom three joints thread locked f) pump job with bottom plug only.
- Cement the casing annulus to surface. Top out jobs to be performed if needed. Depending to depth of top of cement in the annulus, a 1" tubing string may or may not be utilized.

Type	Sacks	Interval	Density	Yield	Hole Volume	Cement Volume	Excess
Lead	252	0'-1,500'	11.0 ppg	3.82 CFS	619 CF	835 CF	35%
Tail	219	1,500'-2,000'	15.6 ppg	1.18 CFS	220 CF	297 CF	35%
Top Out	100	0'-200'	15.6 ppg	1.18 CFS	95 CF	118 CF	24% (if required)

Lead Mix: Premium Plus V blend. Blend includes Class "G" cement, gel, salt, gilsonite.
Slurry yield: 3.82 cf/sack Slurry weight: 11.00 #/gal.
Water requirement: 22.95 gal/sack

Tail Mix: Class "G" Cement, 1/4 lb/sk Cellophane Flakes + 2% bwoc Calcium Chloride + 44.3% fresh water.
Slurry yield: 1.18 cf/sack Slurry weight: 15.60 #/gal.
Water requirement: 5.2 gal/sack

Top Out: Class "G" Cement, 1/4 lb/sk Cellophane Flakes + 2% bwoc Calcium Chloride + 44.3% fresh water.
Slurry yield: 1.18 cf/sack Slurry weight: 15.60 #/gal.
Water requirement: 5.2 gal/sack

c. Production Casing Cement:

- Drill 7-7/8" hole to 8,600'±, run and cement 5 1/2".
- Cement interface is at 4,000', which is typically 500'-1,000' above shallowest pay.
- Pump 20 bbl Mud Clean II unweighted spacer, followed by 20 Bbls fresh H2O spacer.
- Displace with 3% KCL.

Type	Sacks	Interval	Density	Yield	Hole Volume	Cement Volume	Excess
Lead	160	3,700'-4,700'	11.5 ppg	3.12 CFS	175 CF	350 CF	100%
Tail	435	4,700'-8,600'	13.0 ppg	1.75 CFS	473 CF	946 CF	100%

Note: A caliper log will be ran to determine cement volume requirements.

Lead Mix: Halliburton Prem Plus V blend. Blend includes Class "C" cement, gel, salt, gilsonite, EX-1 and HR-7.
Slurry yield: 3.12 cf/sack Slurry weight: 11.60 #/gal.
Water requirement: 17.71 gal/sack
Compressives @ 130°F: 157 psi after 24 hours

Tail Mix: Halliburton HLC blend (Prem Plus V/JB flyash). Blend includes Class "G" cement, KCl, EX-1, Halad 322, & HR-5.
Slurry yield: 1.75 cf/sack Slurry weight: 13.00 #/gal.
Water requirement: 9.09 gal/sack
Compressives @ 165°F: 905 psi after 24 hours

13. ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS

Starting Date: February 1, 2005
Duration: 14 Days

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-35128
Well Name: RBU 6-10F
Location: Section 10-10S-20E, 1733' FNL & 2490' FWL
Company Permit Issued to: Dominion Exploration & Production, Inc.
Date Original Permit Issued: 8/18/2003

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☐

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐

Carla Christian
Signature

8/3/2004

Date

Title: Regulatory Specialist

Representing: Dominion Exploration & Production, Inc.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000**SUNDRY NOTICES AND REPORTS ON WELLS**
*Do not use this form for proposals to drill or to re-enter an
abandoned well. Use form 3160-3 (APD) for such proposals.***SUBMIT IN TRIPLICATE - Other instructions on reverse side.**

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

DOMINION EXPL & PRODUCTION INC

Contact:

CARLA CHRISTIAN

E-Mail: Carla_M_Christian@dom.com

3a. Address

14000 QUAIL SPRINGS PKWY, #600
OKLAHOMA CITY, OK 73134-2600

3b. Phone No. (include area code)

Ph: 405.749.5263
Fx: 405.749.6690

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Sec 10 T10S R20E SENW 1733FNL 2490FWL

5. Lease Serial No.

UTU7206

6. If Indian, Allottee or Tribe Name

UINTAH AND OURAY

7. If Unit or CA/Agreement, Name and/or No.

UTU63054A

8. Well Name and No.

RBU 6-10F

9. API Well No.

43-047-35128-00-X1

10. Field and Pool, or Exploratory

RIVER BEND

11. County or Parish, and State

UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Change to Original A
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	PD

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

The State APD for this well expires August 18 2004. Dominion is hereby requesting a one year extension. Dominion would also like to eliminate the 13 3/8" surface casing and change the TD as reflected in the attached new drilling plan.

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #33995 verified by the BLM Well Information System
For DOMINION EXPL & PRODUCTION INC, sent to the Vernal
Committed to AFMSS for processing by LESLIE WALKER on 08/06/2004 (04LW4610SE)

Name (Printed/Typed) CARLA CHRISTIAN

Title AUTHORIZED REPRESENTATIVE

Signature (Electronic Submission)

Date 08/03/2004

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By KIRK FLEETWOOD

Title PETROLEUM ENGINEER

Date 09/07/2004

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office Vernal

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ****

Revisions to Operator-Submitted EC Data for Sundry Notice #33995

	Operator Submitted	BLM Revised (AFMSS)
Sundry Type:	APDCH NOI	APDCH NOI
Lease:	U-7206	UTU7206
Agreement:		UTU63054A
Operator:	DOMINION EXPL. & PROD., INC. 14000 QUAIL SPRINGS PARKWAY, SUITE 600 OKLAHOMA CITY, OK 73134 Ph: 405.749.5263 Fx: 405.749.6690	DOMINION EXPL & PRODUCTION INC 14000 QUAIL SPRINGS PKWY, #600 OKLAHOMA CITY, OK 73134-2600 Ph: 405.749.5273
Admin Contact:	CARLA CHRISTIAN AUTHORIZED REPRESENTATIVE E-Mail: Carla_M_Christian@dom.com Ph: 405.749.5263 Fx: 405.749.6690	CARLA CHRISTIAN AUTHORIZED REPRESENTATIVE E-Mail: Carla_M_Christian@dom.com Ph: 405.749.5263 Fx: 405.749.6690
Tech Contact:		
Location:		
State:	UT	UT
County:	UINTAH	UINTAH
Field/Pool:	NATURAL BUTTES	RIVER BEND
Well/Facility:	RBU 6-10F Sec 10 T10S R20E SENW 1733FNL 2490FWL	RBU 6-10F Sec 10 T10S R20E SENW 1733FNL 2490FWL

Dominion Exploration and Prod. Inc.
APD Extension

Well: HCU 6-10F

Location: SENW Sec. 10, T10S, R20E

Lease: U-7206

Conditions of Approval

An extension for the referenced APD is granted with the following condition(s):

1. The extension will expire 1/14/06
2. No other extensions beyond that time frame will be granted or allowed.

If you have any other questions concerning this matter, please contact Kirk Fleetwood at (435) 781-4486.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB No. 1004-0135
Expires: November 30, 2000**SUNDRY NOTICES AND REPORTS ON WELLS**
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.**SUBMIT IN TRIPLICATE - Other Instructions on reverse side**

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Dominion Exploration & Production, Inc.

3a. Address Suite 600
14000 Quail Springs Parkway, OKC, OK 731343b. Phone No. (include area code)
(405) 749-5263

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1733' FNL & 2490' FWL, Sec. 10-10S-20E

5. Lease Serial No.

U-7206

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

River Bend Unit

8. Well Name and No.

RBU 6-10F

9. API Well No.

43-047-35128

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

☒ Notice of Intent☐ Subsequent Report☐ Final Abandonment Notice☐ Acidize☐ Altering Casing☐ Casing Repair☐ Change Plans☐ Convert to Injection☐ Deepen☐ Fracture Treat☐ New Construction☐ Plug and Abandon☐ Plug Back☐ Production (Start/Resume)☐ Reclamation☐ Recomplete☐ Temporarily Abandon☐ Water Disposal☐ Water Shut-Off☐ Well Integrity☒ Other

APD Expiration.

13

Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

The State APD for this well expires August 17, 2005. Dominion is hereby requesting a one year extension.

Approved by the
Utah Division of
Oil, Gas and Mining

Date:

By:

COPY SENT TO OPERATOR

Date:

Initials:

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

Carla Christian

Title Regulatory Specialist

Signature

Date 8/2/2005

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED

AUG 05 2005

DIV. OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-35128
Well Name: RBU 6-10F
Location: Section 10-10S-20E, 1733' FNL & 2490' FWL
Company Permit Issued to: Dominion Exploration & Production, Inc.
Date Original Permit Issued: 8/18/2003

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☐

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐

Carla Christian
Signature

8/3/2005
Date

Title: Regulatory Specialist

Representing: Dominion Exploration & Production, Inc.

**RECEIVED
AUG 05 2005**

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB No. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other Instructions on reverse side

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Dominion Exploration & Production, Inc.

3a. Address Suite 600
14000 Quail Springs Parkway, OKC, OK 731343b. Phone No. (include area code)
(405) 749-5263

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1733' FNL & 2490' FWL, Sec. 10-10S-20E

5. Lease Serial No.

U-7206

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

River Bend Unit

8. Well Name and No.

RBU 6-10F

9. API Well No.

43-047-35128

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

☒ Notice of Intent☐ Subsequent Report☐ Final Abandonment Notice☐ Acidize☐ Altering Casing☐ Casing Repair☐ Change Plans☐ Convert to Injection☐ Deepen☐ Fracture Treat☐ New Construction☐ Plug and Abandon☐ Plug Back☐ Production (Start/Resume)☐ Reclamation☐ Recomplete☐ Temporarily Abandon☐ Water Disposal☐ Water Shut-Off☐ Well Integrity☒ Other

APD Expiration.

13

Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

The State APD for this well expires August 17, 2005. Dominion is hereby requesting a one year extension.

CONDITIONS OF APPROVAL ATTACHED

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

Carla Christian

Title Regulatory Specialist

Signature

Carla Christian

Date 8/2/2005

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Mark Baker

Petroleum Engineer

Date AUG 05 2005

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED

SEP 09 2005

DIV. OF OIL, GAS & MINING

UDOGM

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-35128
Well Name: RBU 6-10F
Location: Section 10-10S-20E, 1733' FNL & 2490' FWL
Company Permit Issued to: Dominion Exploration & Production, Inc.
Date Original Permit Issued: 8/18/2003

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☐

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐

Carla Christian
Signature

8/3/2005
Date

Title: Regulatory Specialist

Representing: Dominion Exploration & Production, Inc.

CONDITIONS OF APPROVAL

Dominion Exploration & Production Inc.

Notice of Intent APD Extension

Lease: UTU-7206
Well: RBU 6-10F
Location: SENW Sec 10-T10S-R20E

An extension for the referenced APD is granted with the following conditions:

1. The extension and APD shall expire on 08/17/06
2. No other extension shall be granted.

If you have any other questions concerning this matter, please contact Matt Baker of this office at (435) 781-4490



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

August 21, 2006

Carla Christian
Dominion Expl & Prod Inc.
14000 Quail Springs Parkway
Oklahoma City, OK 73134

Re: APD Rescinded -RBU 6-10F Sec. 10 T. 10S R. 20E
Uintah County, Utah API No. 43-047-35128


Dear Ms. Christian:

The Application for Permit to Drill (APD) for the subject well was approved by the Division of Oil, Gas and Mining (Division) on August 18, 2003. On August 17, 2004 and August 9, 2005, the Division granted a one-year APD extension. On August 21, 2006, you requested that the division rescind the state approved APD. No drilling activity at this location has been reported to the division. Therefore, approval to drill the well is hereby rescinded, effective August 21, 2006.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Whitney
Engineering Technician

cc: Well File
Bureau of Land Management, Vernal



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Vernal Field Office

170 South 500 East

Vernal, UT 84078

(435) 781-4400 Fax: (435) 781-4410

<http://www.blm.gov/utah/vernal>



IN REPLY REFER TO:

3160

UT08300

September 7, 2006

Carla Christian
Dominion Expl. & Prod., Inc.
14000 Quail Springs Pkwy, Suite 600
Oklahoma City, OK 73134

43-047,35128
Re: Notification of Expiration
Well No. RBU 6-10F
SENW, Sec. 10, T10S, R20E
Uintah County, Utah
Lease No. UTU-7206
River Bend Unit

Dear Ms. Christian:

The Application for Permit to Drill the above-referenced well was approved on January 14, 2004. A one (1) year extension of the original APD was requested. The request was reviewed and the extension approved until January 14, 2006. According to our records, no known activity has transpired at the approved location. In view of the foregoing, this office is notifying you that the approval of the referenced application has expired. If you intend to drill at this location at a future date, a new Application for Permit to Drill must be submitted.

This office requires a letter confirming that no surface disturbance has been made for this drill site. Any surface disturbance associated with the approved location of this well is to be rehabilitated. A schedule for this rehabilitation must be submitted to this office. Your cooperation in this matter is appreciated.

Sincerely,

Leslie Wilcken

Leslie Wilcken
Land Law Examiner

cc: UDOGM

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY

RECEIVED
SEP 11 2006
DIV. OF OIL, GAS & MINING